
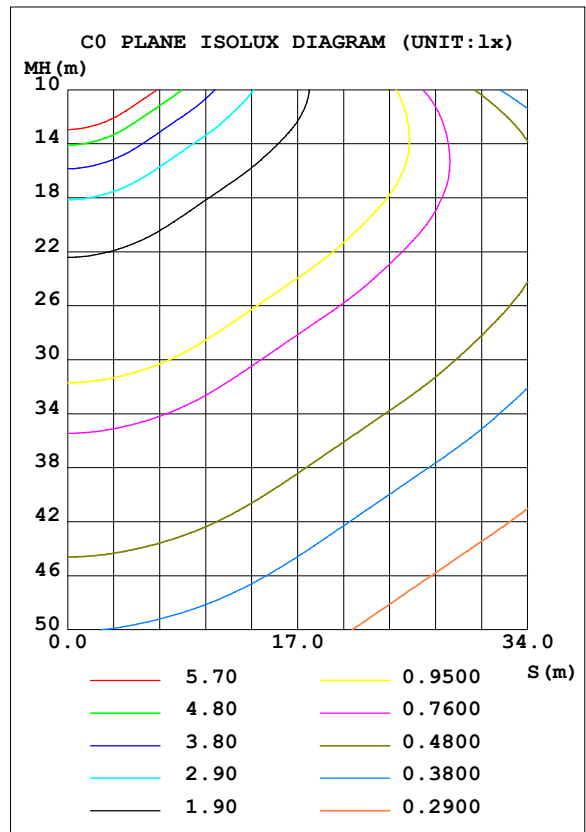


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.89 lm/W			
MODEL	AOK-40Wi	I _{max} (cd)	2103	S/MH (C0/180)	1.49
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	0.84
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	5083.5	η UP, DN (C0-180)	0.1,71.0
NOMINAL FLUX (lm)	5083.46	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2,28.7
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.75
TEST VOLTAGE (V)	220	η down (%)	99.7	CIBSE SHR MAX	1.75

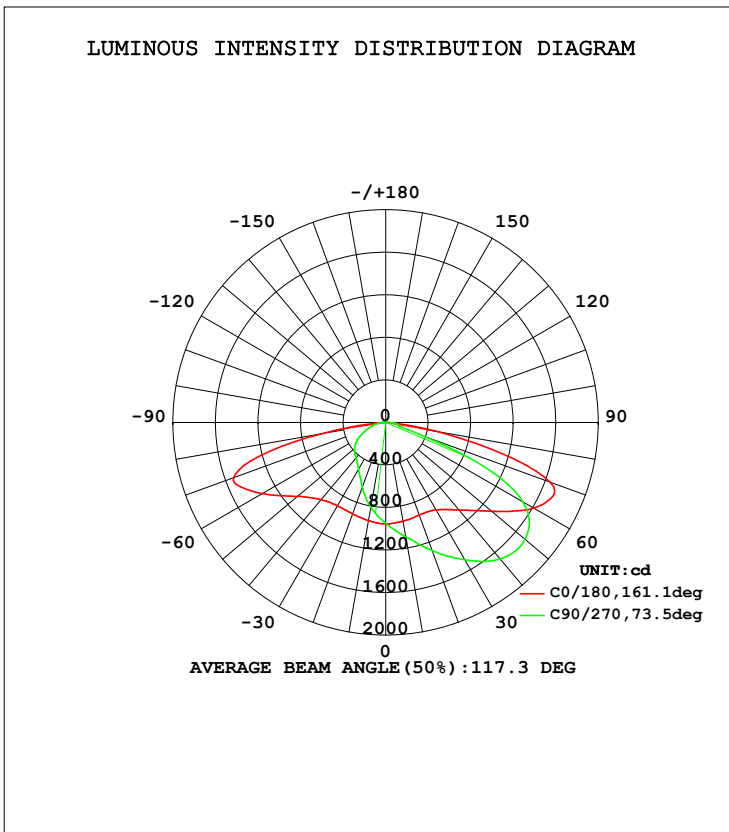

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	943.4	1045	1091	1031	937.9	850.0	810.7	849.4	0- 10	90.39	90.39	1.78,1.78
20	926.7	1156	1283	1137	914.9	737.3	647.1	739.2	10- 20	267.2	357.6	7.03,7.03
30	951.0	1322	1492	1279	907.0	619.0	510.7	629.1	20- 30	439.9	797.5	15.7,15.7
40	1075	1551	1676	1463	948.6	529.6	434.9	558.2	30- 40	624.1	1422	28,28
50	1300	1791	1711	1661	1083	477.5	384.3	516.9	40- 50	830.5	2252	44.3,44.3
60	1610	1959	1489	1838	1341	390.1	293.7	437.7	50- 60	1030	3282	64.6,64.6
70	1644	1632	413.5	1597	1521	239.4	184.9	284.1	60- 70	1086	4368	85.9,85.9
80	478.8	247.5	118.3	263.7	610.0	94.30	98.00	107.9	70- 80	620.0	4988	98.1,98.1
90	0.9094	0.2760	0.2256	0.3385	0.5629	0.8911	5.033	1.377	80- 90	81.73	5070	99.7,99.7
100	1.922	0.4416	0.3406	0.5698	1.634	1.606	0.5803	1.548	90-100	0.7843	5071	99.8,99.8
110	2.553	0.7321	2.386	0.8907	2.558	2.917	3.670	2.783	100-110	1.614	5072	99.8,99.8
120	2.646	0.9672	4.110	1.076	2.860	3.525	7.723	3.468	110-120	2.703	5075	99.8,99.8
130	2.294	1.118	3.948	1.188	2.657	3.473	8.095	3.397	120-130	2.699	5078	99.9,99.9
140	2.068	1.273	2.778	1.288	2.347	3.165	6.229	3.089	130-140	2.160	5080	99.9,99.9
150	2.024	1.464	1.869	1.468	2.160	2.865	4.256	2.829	140-150	1.519	5082	100,100
160	2.068	1.734	1.862	1.753	2.149	2.642	3.296	2.653	150-160	1.045	5083	100,100
170	2.198	2.040	2.000	2.099	2.221	2.483	2.665	2.526	160-170	0.6414	5083	100,100
180	2.263	2.275	2.309	2.309	2.267	2.294	2.321	2.321	170-180	0.2190	5083	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.01	.96	.91	.99	.94	.90	.94	.90	.87	.90	.87	.84	.86	.84	.81	.79
2.0	.85	.77	.70	.83	.75	.69	.79	.73	.67	.76	.70	.66	.73	.68	.64	.62
3.0	.72	.63	.55	.71	.62	.54	.67	.60	.53	.64	.58	.52	.62	.56	.51	.49
4.0	.62	.52	.44	.61	.51	.44	.58	.50	.43	.56	.48	.43	.53	.47	.42	.39
5.0	.54	.44	.37	.53	.44	.36	.51	.42	.36	.49	.41	.35	.47	.40	.35	.33
6.0	.48	.38	.31	.47	.38	.31	.45	.37	.30	.43	.36	.30	.42	.35	.30	.27
7.0	.43	.33	.26	.42	.33	.26	.41	.32	.26	.39	.31	.26	.37	.31	.25	.23
8.0	.39	.29	.23	.38	.29	.23	.37	.28	.23	.35	.28	.22	.34	.27	.22	.20
9.0	.35	.26	.20	.35	.26	.20	.33	.26	.20	.32	.25	.20	.31	.25	.20	.18
10.0	.32	.24	.18	.32	.23	.18	.31	.23	.18	.30	.23	.18	.29	.22	.18	.16

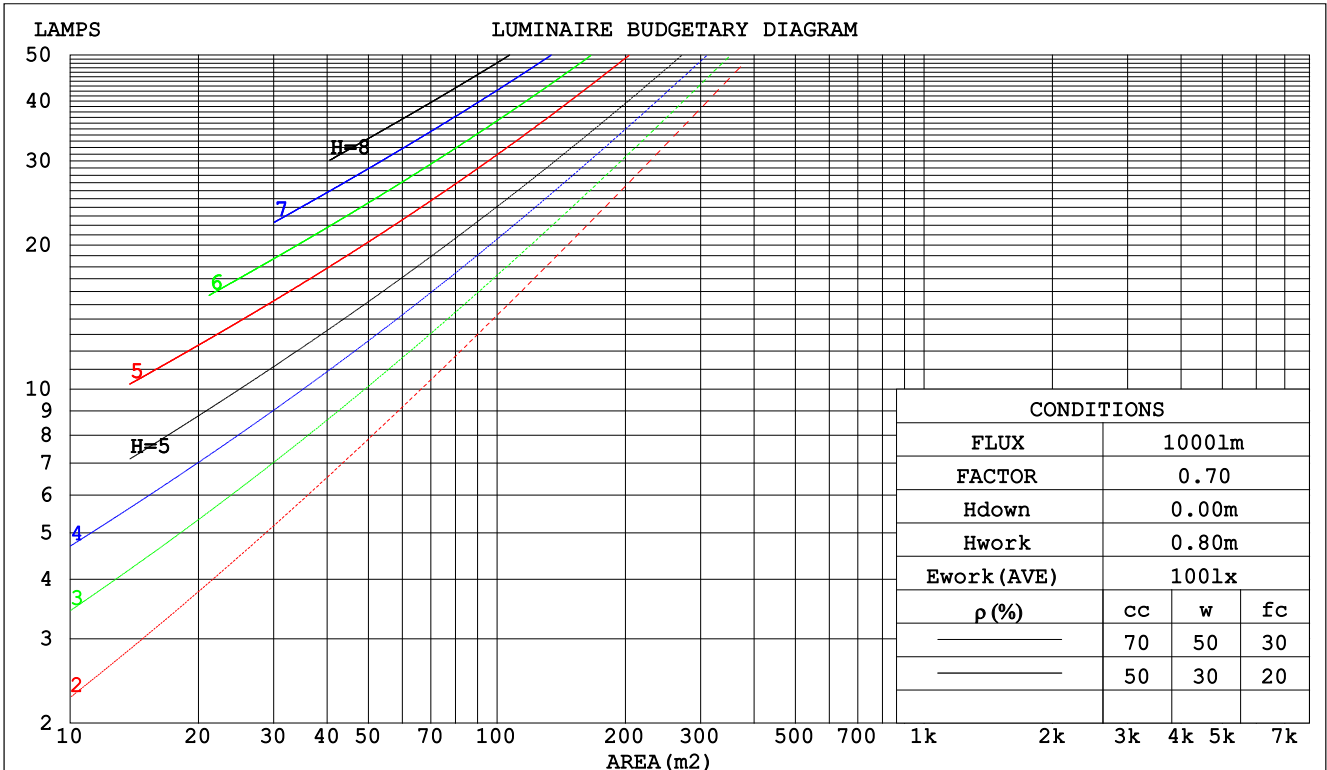

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

WEC AND CCEC

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.365	.207	.066	.358	.204	.065	.344	.197	.063	.331	.191	.061	.320	.185	.060	
2.0	.344	.189	.058	.338	.186	.057	.325	.181	.056	.314	.176	.055	.303	.172	.054	
3.0	.315	.168	.050	.309	.166	.050	.298	.162	.049	.288	.158	.048	.279	.154	.048	
4.0	.287	.149	.044	.282	.147	.044	.272	.144	.043	.263	.141	.043	.254	.138	.042	
5.0	.262	.133	.039	.257	.132	.038	.249	.129	.038	.240	.127	.038	.233	.124	.037	
6.0	.240	.120	.034	.236	.119	.034	.228	.117	.034	.221	.115	.034	.214	.113	.033	
7.0	.221	.109	.031	.217	.108	.031	.210	.106	.031	.204	.105	.030	.198	.103	.030	
8.0	.205	.100	.028	.201	.099	.028	.195	.097	.028	.189	.096	.028	.184	.094	.027	
9.0	.190	.092	.026	.187	.091	.026	.182	.090	.025	.176	.088	.025	.171	.087	.025	
10.0	.177	.085	.024	.175	.084	.024	.170	.083	.023	.165	.082	.023	.161	.081	.023	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.186	.158	.132	.159	.135	.114	.109	.093	.079	.063	.054	.046	.020	.017	.015	
2.0	.181	.134	.094	.155	.115	.081	.106	.080	.057	.061	.046	.033	.020	.015	.011	
3.0	.175	.117	.070	.150	.101	.061	.103	.070	.043	.060	.041	.025	.019	.013	.008	
4.0	.168	.104	.055	.144	.090	.048	.099	.063	.033	.057	.037	.020	.018	.012	.007	
5.0	.161	.094	.045	.138	.081	.039	.095	.057	.027	.055	.033	.016	.018	.011	.005	
6.0	.153	.086	.037	.132	.074	.033	.091	.052	.023	.053	.031	.014	.017	.010	.005	
7.0	.146	.079	.032	.125	.069	.028	.087	.048	.020	.050	.028	.012	.016	.009	.004	
8.0	.139	.073	.028	.119	.064	.025	.083	.045	.018	.048	.026	.010	.016	.009	.003	
9.0	.132	.068	.025	.114	.059	.022	.079	.042	.016	.046	.025	.009	.015	.008	.003	
10.0	.126	.064	.023	.108	.056	.020	.075	.039	.014	.044	.023	.009	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

UGR(Unified Glare Rating) Table

NAME: LED Street Light		TYPE:LED					WEIGHT:5.5kg				
SPEC.:C470SP-Q2-P-03A 230V50HZ		DIM.: 495*300*107mm					SERIAL No.:1				
MFR.: EVERFINE		SUR.:79*230mm					PROTECTION ANGLE:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	27.5	29.3	27.8	29.5	29.7	27.2	28.9	27.5	29.2	29.4	
3H	30.8	32.4	31.1	32.7	32.9	28.5	30.1	28.8	30.3	30.6	
4H	31.9	33.4	32.2	33.7	34.0	28.5	30.0	28.8	30.3	30.6	
6H	32.3	33.7	32.6	34.0	34.3	28.4	29.9	28.8	30.2	30.5	
8H	32.3	33.7	32.6	34.0	34.3	28.4	29.8	28.7	30.1	30.4	
12H	32.3	33.6	32.6	33.9	34.2	28.4	29.7	28.7	30.0	30.3	
4H 2H	28.8	30.4	29.2	30.6	30.9	28.5	30.1	28.9	30.4	30.6	
3H	32.2	33.5	32.5	33.9	34.2	30.0	31.4	30.4	31.7	32.0	
4H	33.3	34.6	33.7	34.9	35.3	30.1	31.3	30.5	31.7	32.0	
6H	33.7	34.9	34.2	35.2	35.6	30.0	31.2	30.5	31.5	31.9	
8H	33.8	34.8	34.2	35.2	35.6	30.0	31.1	30.5	31.4	31.8	
12H	33.7	34.7	34.2	35.1	35.5	30.0	31.0	30.5	31.4	31.8	
8H 4H	33.5	34.5	33.9	34.9	35.3	30.7	31.7	31.1	32.1	32.5	
6H	34.0	34.9	34.4	35.3	35.7	30.7	31.6	31.1	32.0	32.4	
8H	34.0	34.8	34.5	35.2	35.7	30.7	31.5	31.2	31.9	32.3	
12H	34.0	34.7	34.5	35.1	35.6	30.7	31.4	31.2	31.8	32.3	
12H 4H	33.5	34.4	33.9	34.8	35.2	30.7	31.7	31.2	32.1	32.5	
6H	34.0	34.7	34.4	35.2	35.6	30.7	31.5	31.2	31.9	32.4	
8H	34.0	34.7	34.5	35.1	35.6	30.7	31.4	31.2	31.8	32.3	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4					
2.0H	+ 0.5 / - 0.6					+ 1.1 / - 1.7					

CIE Pub.117 Corrected 5083 lm Total Lamp Luminous Flux. (8log(F/F0) = 5.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

UTILIZATION FACTORS TABLE

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	48	35	27	48	35	27	46	34	27	20
0.80	58	45	36	57	44	36	55	43	35	27
1.00	67	54	45	66	53	45	63	55	44	36
1.25	75	62	53	73	61	53	70	60	52	43
1.50	80	68	60	79	67	59	75	65	58	49
2.00	89	78	70	87	77	70	83	75	68	59
2.50	94	84	77	92	83	76	87	80	74	65
3.00	98	90	83	96	88	82	91	85	80	70
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	101	96	104	99	94	99	95	91	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

ISOCANDELA DIAGRAM


NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

Conical surface Flux(90deg):

1810.2 lm
%lum = 35.6%
%lamp = 35.6%

Conical surface Flux(120deg):

3282.4 lm
%lum = 64.6%
%lamp = 64.6%

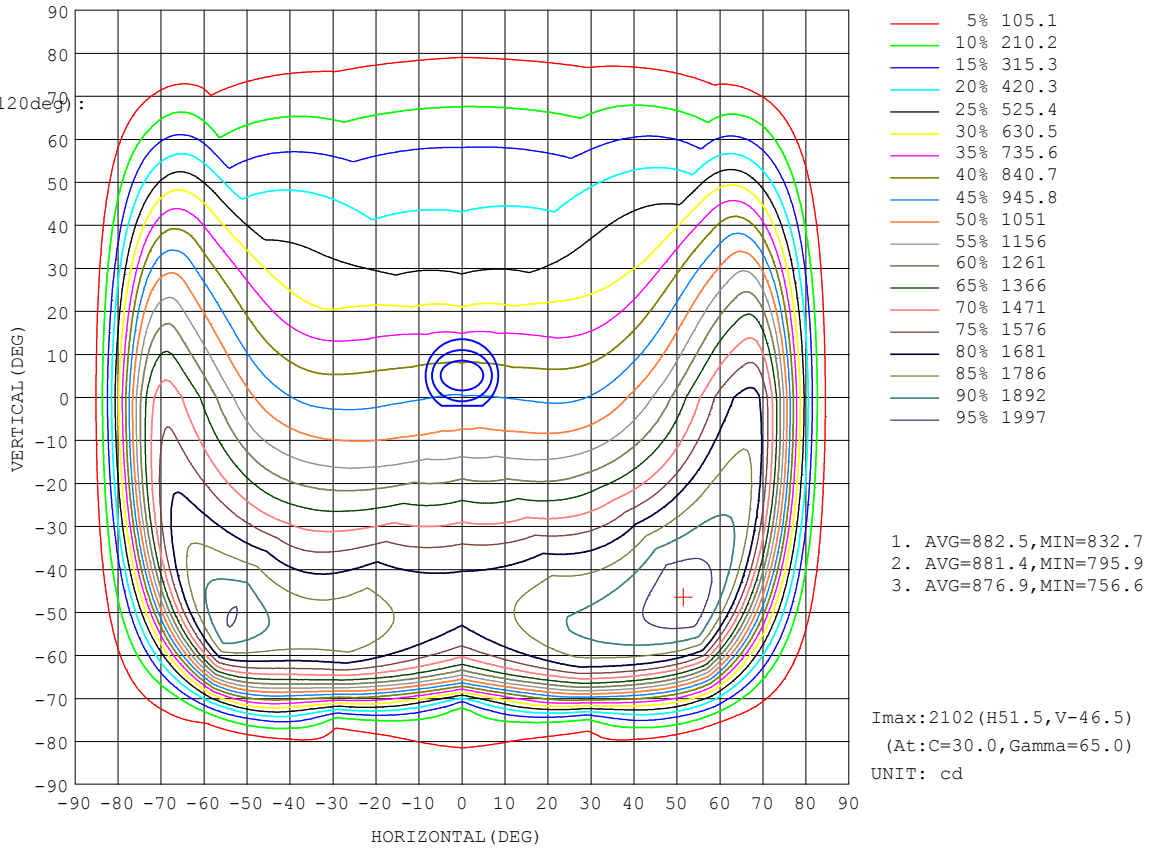


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2016-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.610m [K=1.0013]
Remarks: 5700K Ra70

AAI Figure

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

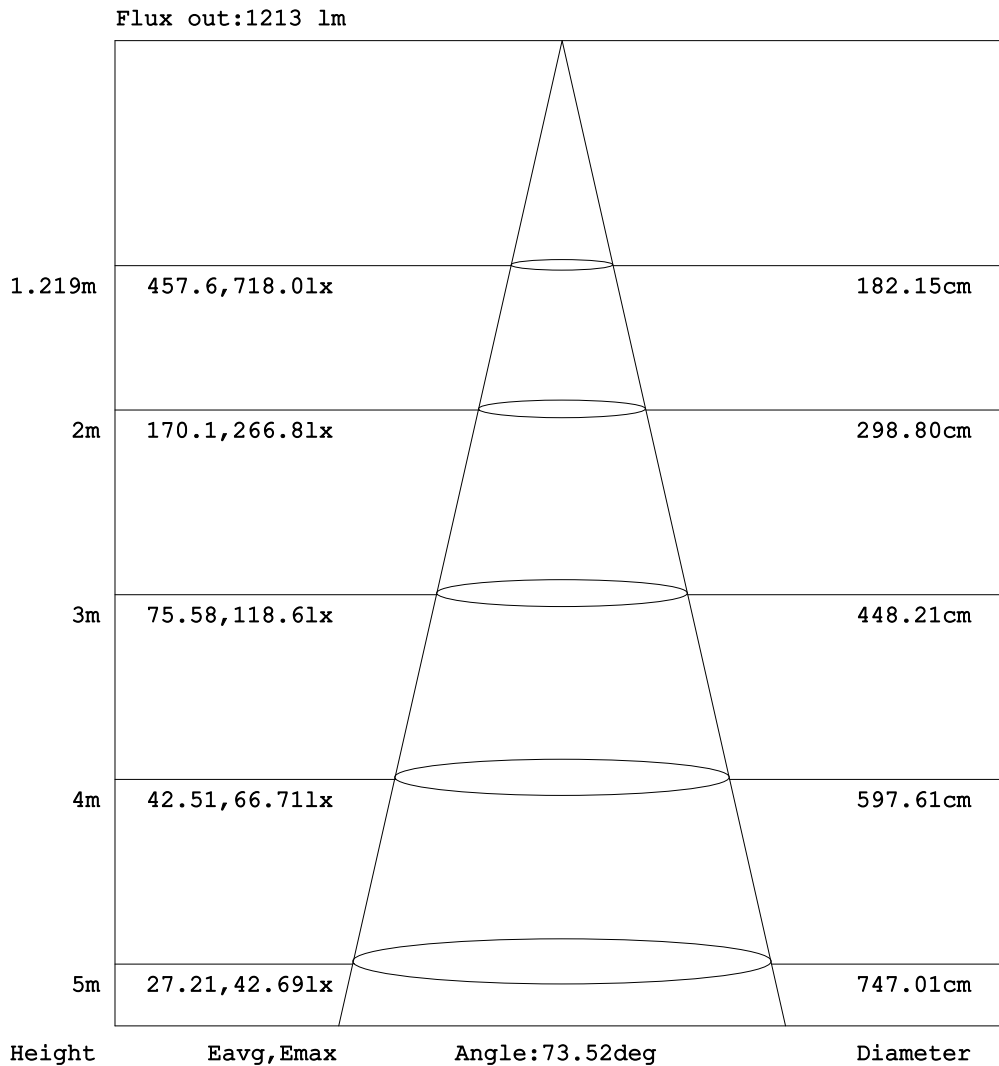


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

ISOLUX DIAGRAM

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

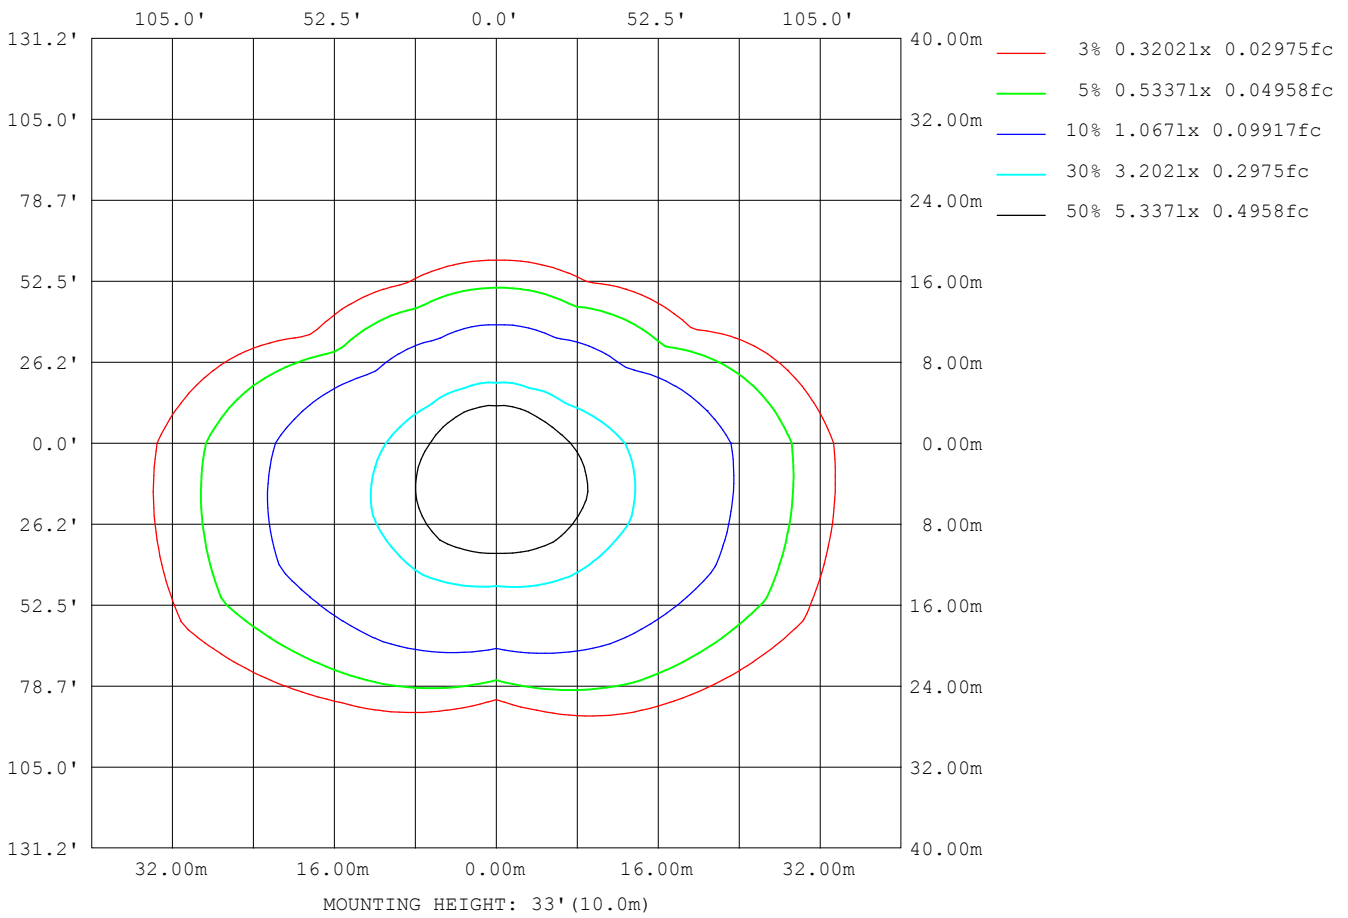

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

LED Avg.L Report

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180 (65) av	37550
L_0~180 (75) av	45713
L_0~180 (85) av	11354
L_90~270 (65) av	15966
L_90~270 (75) av	5055
L_90~270 (85) av	6858
L_45 (65) av	26217
L_45 (75) av	21295
L_45 (85) av	5272

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70

Planar Illuminance Curve

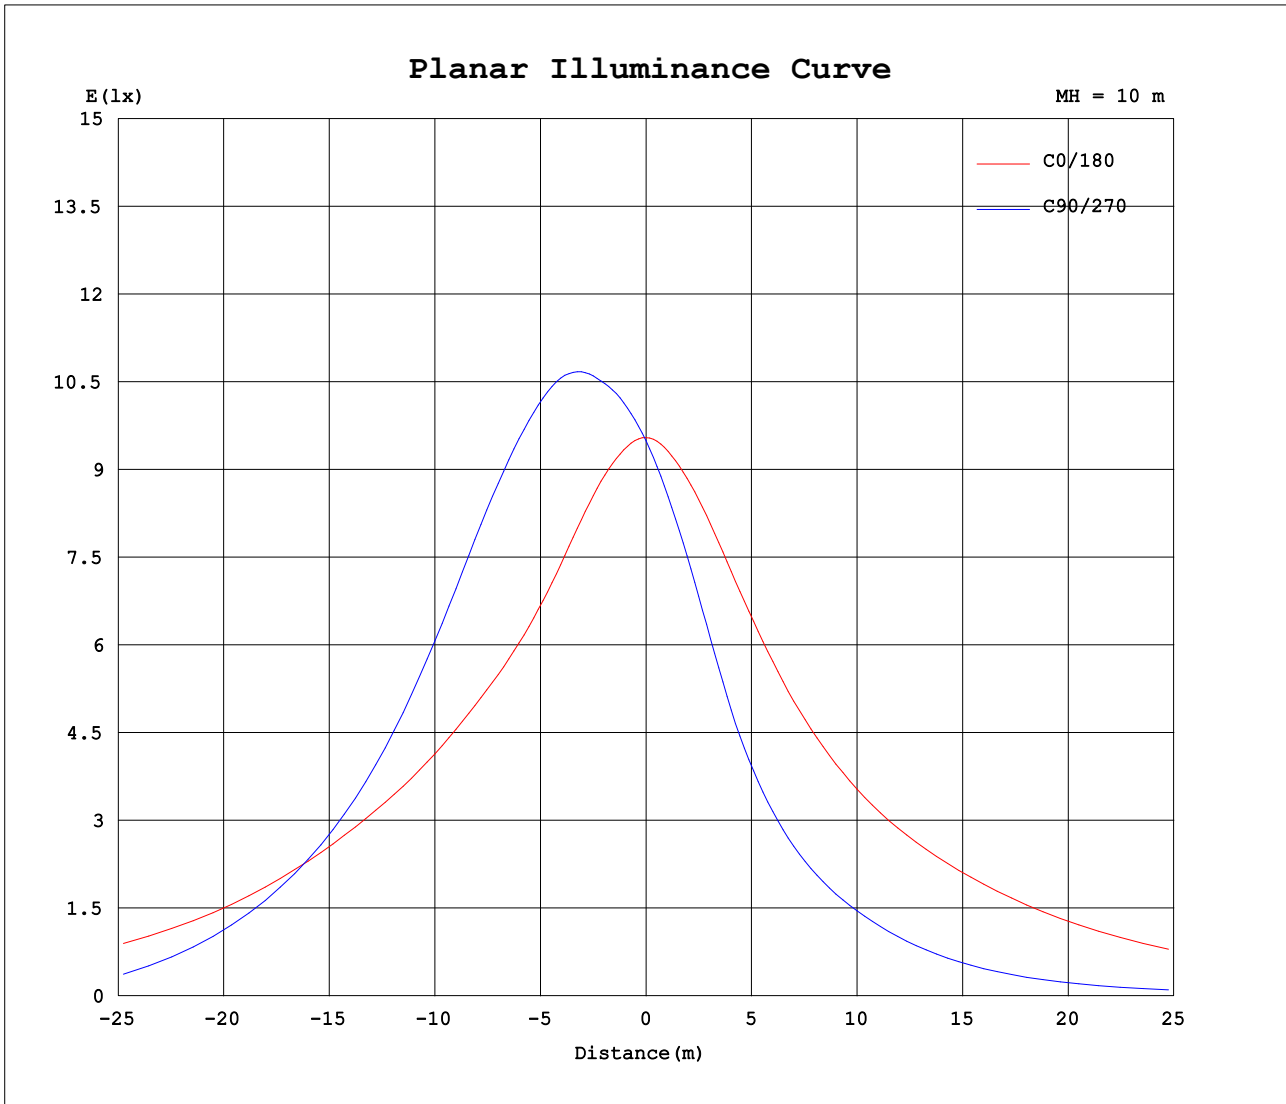

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 7.610m [K=1.0013]
 Remarks: 5700K Ra70

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED Street Light	TYPE:LED	WEIGHT:5.5kg
SPEC.:C470SP-Q2-P-03A 230V50HZ	DIM.: 495*300*107mm	SERIAL No.:1
MFR.: EVERFINE	SUR.:79*230mm	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	955	955	954	949	947	944	955	955	954	949	947	944							
5	951	986	1012	1017	1003	973	949	914	892	882	890	908							
10	943	1015	1075	1091	1063	999	938	872	828	811	829	869							
15	935	1045	1144	1180	1133	1028	927	830	760	732	763	830							
20	927	1082	1230	1283	1215	1059	915	787	688	647	692	787							
25	928	1133	1329	1388	1308	1097	907	742	614	569	617	744							
30	951	1207	1437	1492	1409	1149	907	690	548	511	554	704							
35	1000	1304	1555	1594	1521	1213	918	642	493	466	501	673							
40	1075	1427	1674	1676	1633	1293	949	606	453	435	463	654							
45	1171	1570	1777	1717	1732	1391	1000	583	422	412	433	642							
50	1300	1731	1852	1711	1808	1515	1083	564	391	384	402	632							
55	1457	1900	1891	1649	1853	1672	1203	533	351	345	360	611							
60	1610	2040	1878	1489	1844	1832	1341	483	298	294	306	569							
65	1706	2103	1737	1113	1689	1974	1468	406	236	237	245	494							
70	1644	1971	1292	414	1200	1994	1521	303	176	185	187	381							
75	1132	1402	458	129	387	1563	1234	189	126	133	135	243							
80	479	407	88.1	118	85.1	442	610	101	87.4	98.0	92.3	123							
85	86.5	46.3	61.1	63.6	62.2	49.7	111	37.6	47.8	55.9	51.5	40.9							
90	0.91	0.33	0.22	0.23	0.27	0.41	0.56	0.51	1.27	5.03	2.23	0.52							
95	1.41	0.45	0.23	0.26	0.29	0.59	1.05	1.14	0.64	0.23	0.54	1.17							
100	1.92	0.62	0.26	0.34	0.31	0.83	1.63	1.93	1.28	0.58	1.14	1.95							
105	2.31	0.81	0.36	0.54	0.41	1.06	2.17	2.64	1.99	1.18	1.85	2.58							
110	2.55	0.99	0.47	2.39	0.52	1.26	2.56	3.22	2.61	3.67	2.49	3.07							
115	2.66	1.14	0.59	4.21	0.63	1.36	2.79	3.60	3.07	7.63	3.05	3.41							
120	2.65	1.23	0.70	4.11	0.74	1.41	2.86	3.70	3.35	7.72	3.45	3.49							
125	2.48	1.29	0.80	4.27	0.85	1.43	2.80	3.65	3.51	8.20	3.60	3.43							
130	2.29	1.33	0.91	3.95	0.94	1.44	2.66	3.43	3.51	8.10	3.57	3.22							
135	2.15	1.37	0.99	3.53	1.03	1.45	2.50	3.20	3.45	7.25	3.48	3.01							
140	2.07	1.43	1.11	2.78	1.11	1.47	2.35	3.00	3.33	6.23	3.36	2.82							
145	2.03	1.50	1.23	2.01	1.21	1.51	2.24	2.83	3.17	5.01	3.23	2.68							
150	2.02	1.59	1.34	1.87	1.33	1.60	2.16	2.70	3.04	4.26	3.07	2.58							
155	2.03	1.70	1.48	1.85	1.48	1.71	2.15	2.58	2.91	3.66	2.92	2.52							
160	2.07	1.82	1.65	1.86	1.66	1.85	2.15	2.50	2.78	3.30	2.81	2.50							
165	2.13	1.97	1.83	1.92	1.85	2.00	2.18	2.45	2.68	3.03	2.71	2.48							
170	2.20	2.10	1.98	2.00	2.03	2.17	2.22	2.42	2.55	2.67	2.58	2.47							
175	2.26	2.21	2.14	2.17	2.18	2.27	2.26	2.37	2.40	2.47	2.43	2.43							
180	2.26	2.27	2.28	2.31	2.29	2.32	2.27	2.29	2.29	2.32	2.31	2.34							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2016-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.610m [K=1.0013]
 Remarks: 5700K Ra70