


## 室内灯具光度数据

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型: LED 5050灯珠	灯具重量: 26KG
灯具规格: AOK-750WoFS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.54*0.2M	测试编号:
制造厂商: AOK	发光口面: 0.52*0.52m	遮光角: 15度

光源数据		光度数据				光效: 145.17 lm/W
型号	5050	峰值光强(cd)	359775	S/MH(C0/180)		0.39
标称功率(W)	750	灯具效率(%)	100.0	S/MH(C90/270)		0.39
额定电源电压(V)	220.0	总光通量(lm)	108972	$\eta$ UP, DN(C0-180)		0.0, 50.4
额定光通量(lm)	108972	CIE分类	直接	$\eta$ UP, DN(C180-360)		0.0, 49.6
灯具内光源数(只)	1	上射光通比(%)	0.0	CIBSE SHR NOM		0.00
实测电源电压(V)	220	下射光通比(%)	100.0	CIBSE SHR MAX		1.00

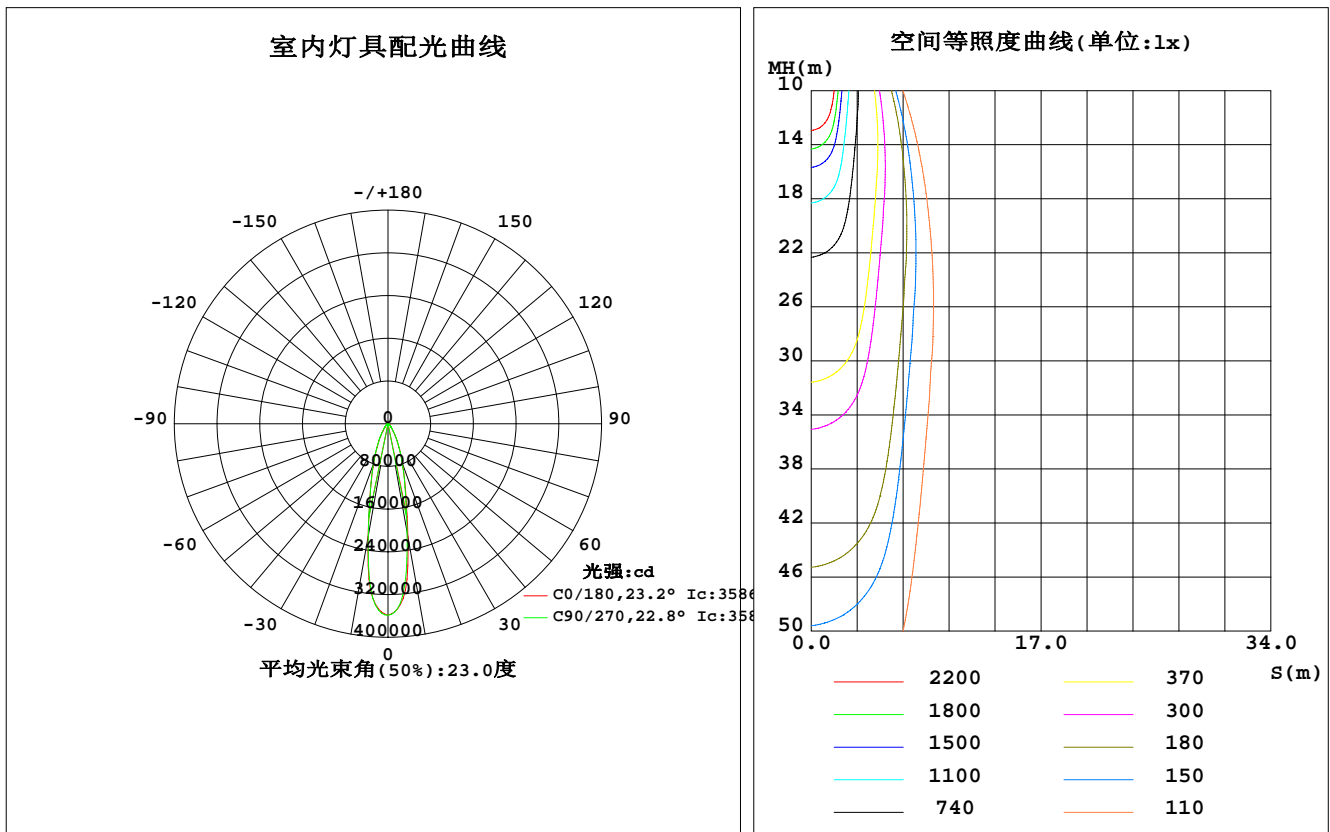

C角度范围: 0度 - 360度  
C角度间隔: 5.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员:  
测试日期: 2019-05-16

$\gamma$ 角度范围: 0度 - 90度  
 $\gamma$ 角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 7.684米 [K=1.0000]  
备注:

## 灯具环带光通量

环带光通量:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\phi$ 环	$\phi$ 总	%lum, lamp
10	2146	2013	2058	2013	2146	1916	2124	1916	0- 10	26637	26637	24.4, 24.4
20	796.0	772.0	785.4	772.0	796.0	761.0	805.2	761.0	10- 20	34941	61578	56.5, 56.5
30	296.3	296.0	301.3	296.0	296.3	298.5	308.7	298.5	20- 30	22942	84519	77.6, 77.6
40	106.9	108.5	113.8	108.5	106.9	114.0	116.5	114.0	30- 40	11663	96182	88.3, 88.3
50	54.19	55.73	58.68	55.73	54.19	58.49	60.20	58.49	40- 50	6202	102384	94, 94
60	26.20	27.00	28.52	27.00	26.20	28.82	29.02	28.82	50- 60	3669	106053	97.3, 97.3
70	11.84	12.26	12.93	12.26	11.84	13.38	13.31	13.38	60- 70	1987	108040	99.1, 99.1
80	3.202	2.990	3.429	2.990	3.202	3.415	3.681	3.415	70- 80	819.0	108859	99.9, 99.9
90	0	0	0	0	0	0	0	0	80- 90	112.6	108972	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
单位:°	光强:×100cd									单位:lm		

锥面光通量(90度): 99643 lm

%lum = 91.4%

%lamp = 91.4%

锥面光通量(120度): 1.0605e+005 lm

%lum = 97.3%


%lamp = 97.3%

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

$\gamma$ 角度范围: 0度 - 90度  
 $\gamma$ 角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

### 灯具亮度限制曲线

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

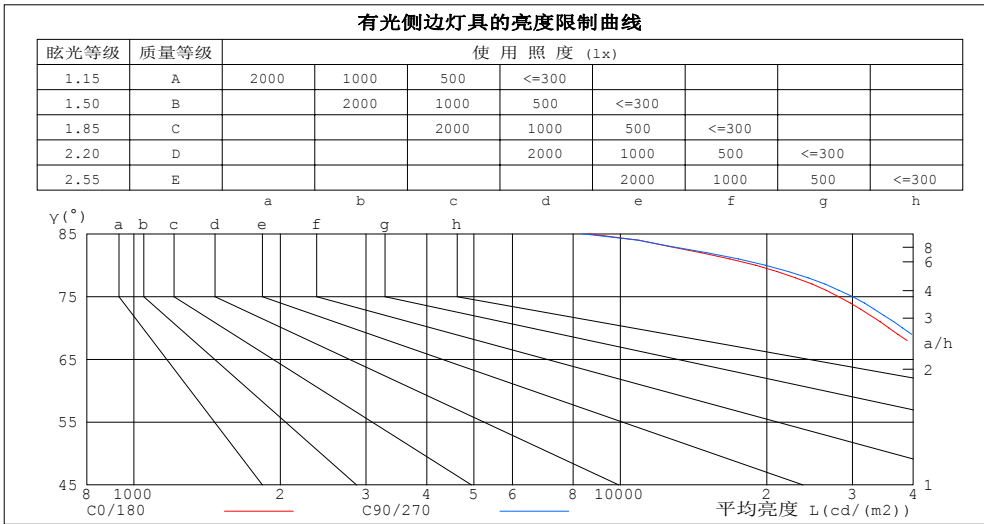

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	8613	8375
80	18975	19860
75	28039	30002
70	35623	38025
65	44290	46999
60	53926	57366
55	66570	70415
50	86745	91813
45	104482	111317


C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

### 工作面利用系数和灯具概算曲线

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型: LED 5050灯珠	灯具重量: 26KG
灯具规格: AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面: 0.52*0.52m	遮光角: 15度

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工作面利用系数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.78	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.74	.70	.78	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.67
8.0	.76	.70	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.60

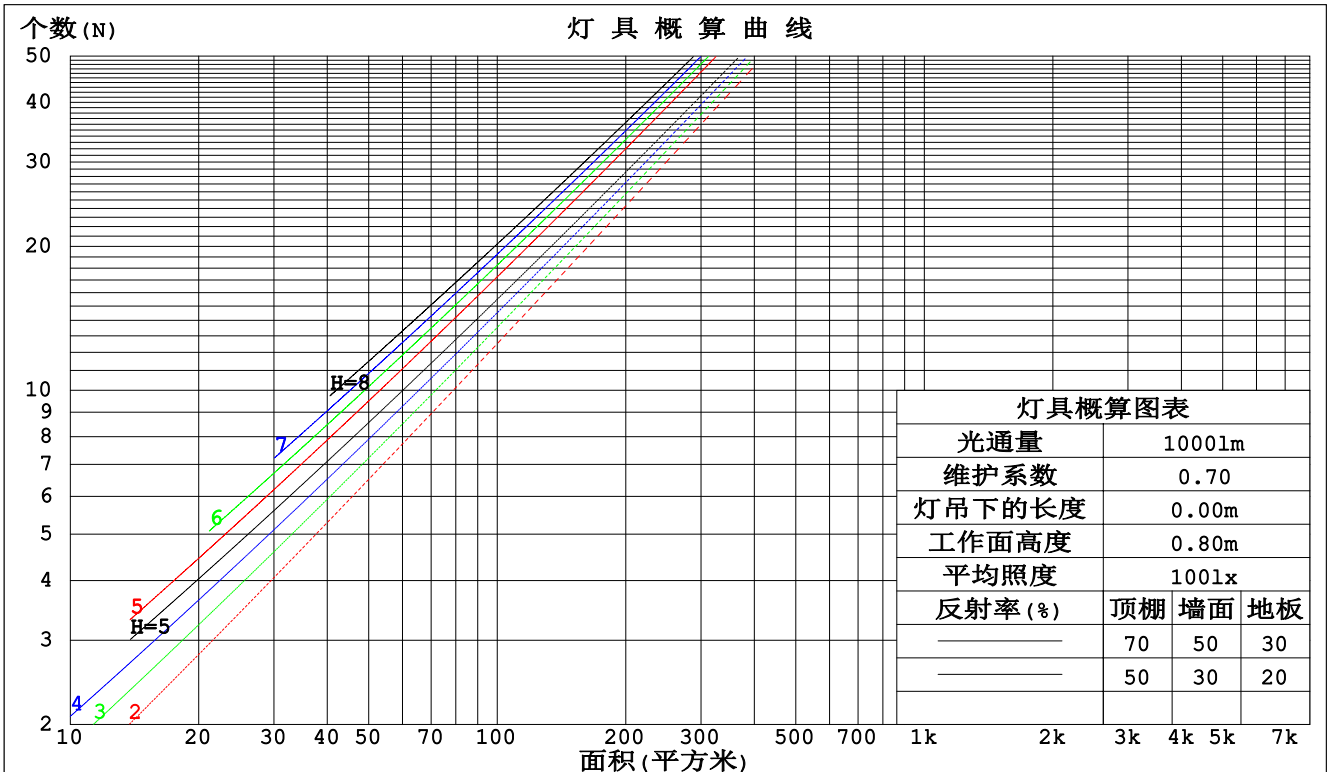

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

## 墙面和天花板利用系数

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm					
灯具名称: AOK-OFS		灯具类型:LED 5050灯珠		灯具重量:26KG	
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P		外型尺寸: 0.54*0.54*0.2M		测试编号:	
制造厂商: AOK		发光口面:0.52*0.52m		遮光角:15度	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙壁面利用系数															
0.0																
1.0	.171	.097	.031	.164	.094	.030	.152	.087	.028	.140	.081	.026	.130	.075	.024	
2.0	.162	.089	.027	.157	.086	.027	.146	.081	.025	.136	.077	.024	.127	.072	.023	
3.0	.153	.081	.024	.148	.079	.024	.139	.075	.023	.131	.072	.022	.123	.068	.021	
4.0	.144	.075	.022	.140	.073	.022	.132	.070	.021	.125	.067	.020	.118	.064	.020	
5.0	.136	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.114	.061	.018	
6.0	.128	.064	.018	.125	.063	.018	.119	.061	.018	.114	.059	.017	.109	.057	.017	
7.0	.122	.060	.017	.119	.059	.017	.114	.058	.017	.109	.056	.016	.105	.054	.016	
8.0	.116	.056	.016	.113	.056	.016	.109	.054	.016	.104	.053	.015	.100	.052	.015	
9.0	.110	.053	.015	.108	.053	.015	.104	.051	.015	.100	.050	.014	.097	.049	.014	
10.0	.105	.050	.014	.103	.050	.014	.100	.049	.014	.096	.048	.014	.093	.047	.013	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.058	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.084	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.131	.099	.074	.112	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.042	.031	.022	.013	.010	.007	
6.0	.113	.077	.051	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.077	.046	.025	.054	.032	.018	.031	.019	.011	.010	.006	.004	

C角度范围: 0度 - 360度  
C角度间隔: 5.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员:  
测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
γ角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 7.684米 [K=1.0000]  
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WoFS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	7.1	7.9	7.3	8.1	8.3	7.4	8.2	7.6	8.4	8.5
3H	7.5	8.3	7.7	8.5	8.7	7.8	8.6	8.0	8.8	9.0
4H	7.6	8.3	7.8	8.5	8.8	7.9	8.6	8.2	8.9	9.1
6H	7.6	8.3	7.9	8.5	8.8	7.9	8.6	8.2	8.9	9.1
8H	7.6	8.3	7.9	8.5	8.8	7.9	8.6	8.2	8.8	9.1
12H	7.5	8.2	7.9	8.5	8.7	7.9	8.5	8.2	8.8	9.1
4H 2H	7.2	8.0	7.5	8.2	8.4	7.5	8.2	7.8	8.5	8.7
3H	7.7	8.4	8.1	8.7	8.9	8.0	8.7	8.3	8.9	9.2
4H	7.9	8.5	8.2	8.8	9.1	8.2	8.8	8.5	9.1	9.4
6H	8.0	8.5	8.3	8.8	9.2	8.2	8.8	8.6	9.1	9.5
8H	7.9	8.4	8.3	8.8	9.2	8.2	8.7	8.6	9.1	9.4
12H	7.9	8.4	8.3	8.7	9.1	8.2	8.6	8.6	9.0	9.4
8H 4H	7.9	8.4	8.3	8.7	9.1	8.2	8.7	8.5	9.0	9.4
6H	8.0	8.4	8.4	8.8	9.2	8.3	8.7	8.7	9.1	9.5
8H	8.0	8.3	8.4	8.7	9.2	8.2	8.6	8.7	9.0	9.5
12H	7.9	8.2	8.4	8.7	9.2	8.2	8.5	8.7	9.0	9.4
12H 4H	7.8	8.3	8.3	8.7	9.1	8.1	8.6	8.5	8.9	9.3
6H	7.9	8.3	8.4	8.7	9.2	8.2	8.6	8.7	9.0	9.4
8H	7.9	8.2	8.4	8.7	9.2	8.2	8.5	8.7	9.0	9.4
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 1.0 / - 1.3					+ 0.9 / - 1.3				
1.5H	+ 1.4 / - 0.9					+ 1.3 / - 0.9				
2.0H	+ 1.6 / - 1.2					+ 1.7 / - 1.3				

依据CIE Pub.117计算, 108972lm光源光通要进行修正(8log(F/F0) = 16.3)。

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度:25.3℃  
 测试人员:  
 测试日期:2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.0.362  
 环境湿度:65.0%  
 测试距离:7.684米 [K=1.0000]  
 备注:

## UF利用系数表

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.54*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS (%) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	81	91	85	81	90	85	81	77
1.00	97	91	87	96	90	86	94	90	86	82
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	98	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯			安装距高比 SHRNM = 1.25				

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

## 灯具等光强曲线

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型: LED 5050灯珠	灯具重量: 26KG
灯具规格: AOK-750WoFS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面: 0.52*0.52m	遮光角: 15度

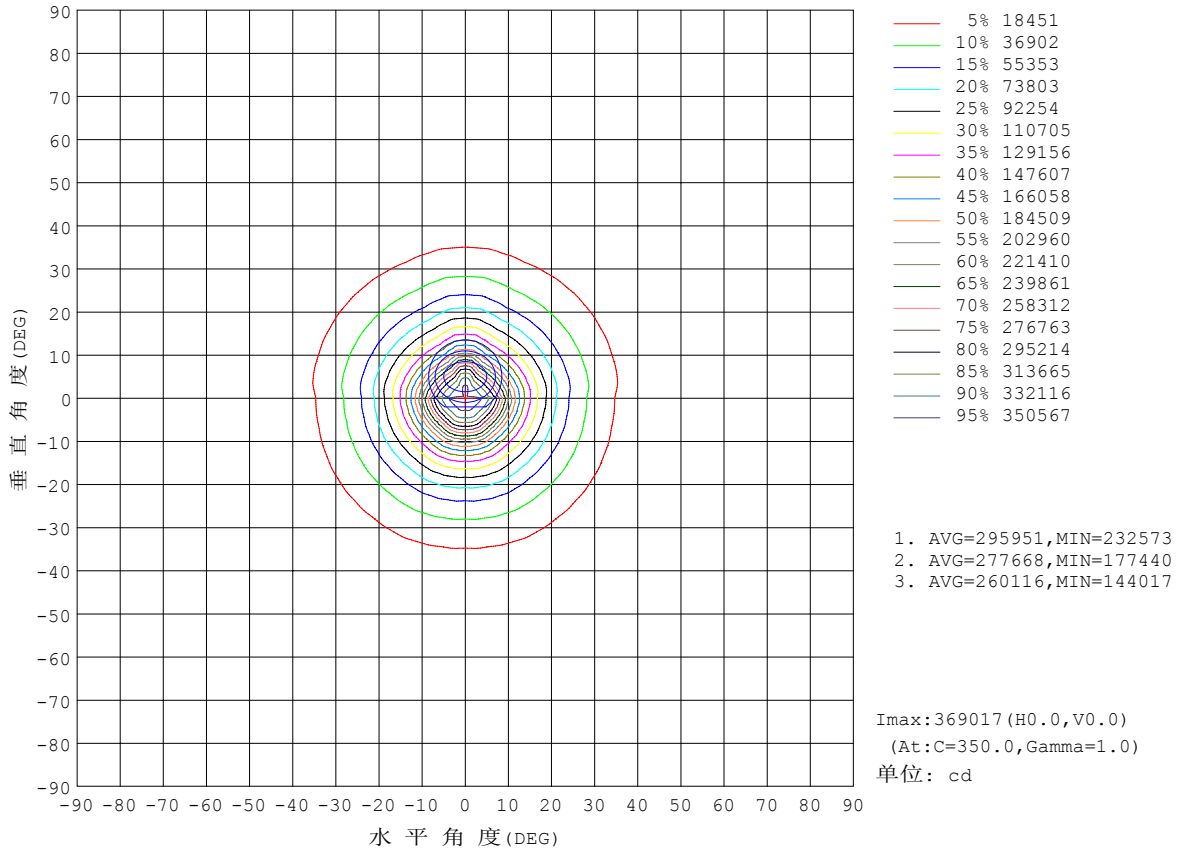

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16


γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:



## 灯具有效平均照度图

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

光通输出:34335 lm

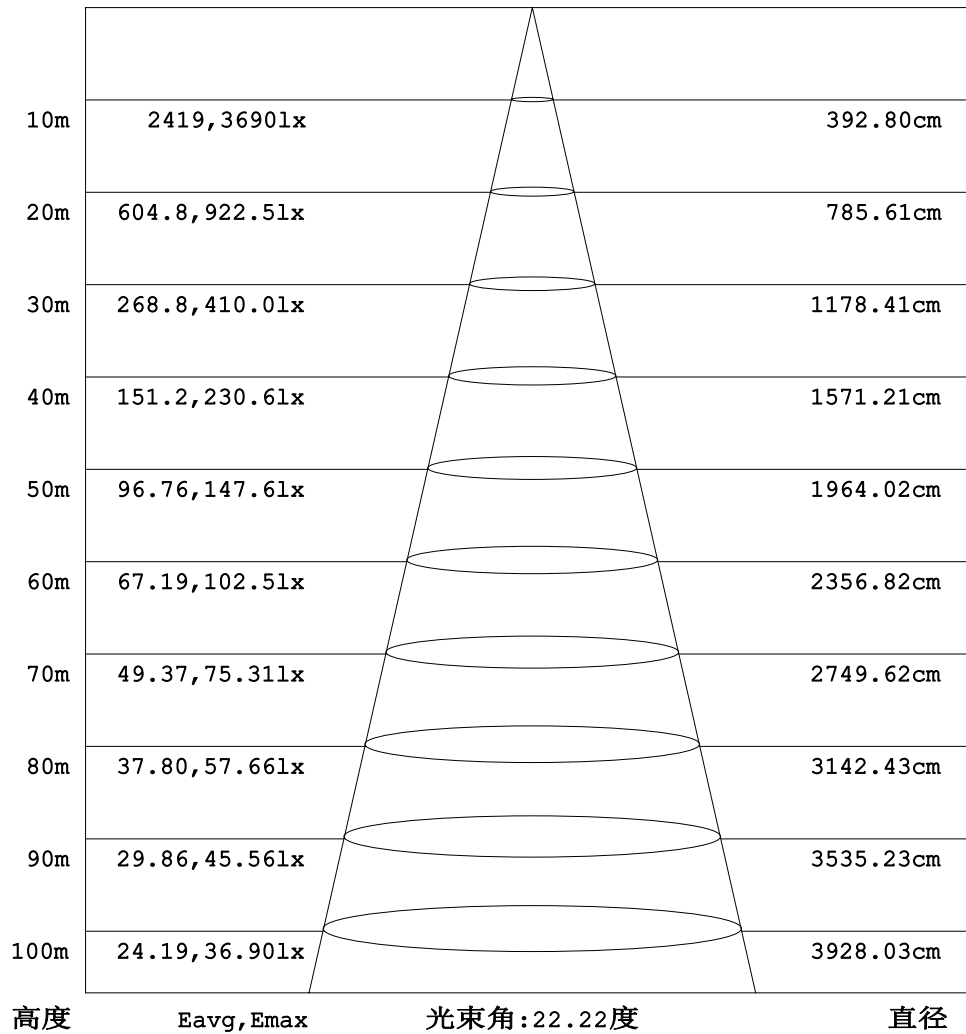


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度.

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度:25.3℃  
 测试人员:  
 测试日期:2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度:65.0%  
 测试距离:7.684米 [K=1.0000]  
 备注:

## 平面等照度曲线

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型: LED 5050灯珠	灯具重量: 26KG
灯具规格: AOK-750WoFS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面: 0.52*0.52m	遮光角: 15度

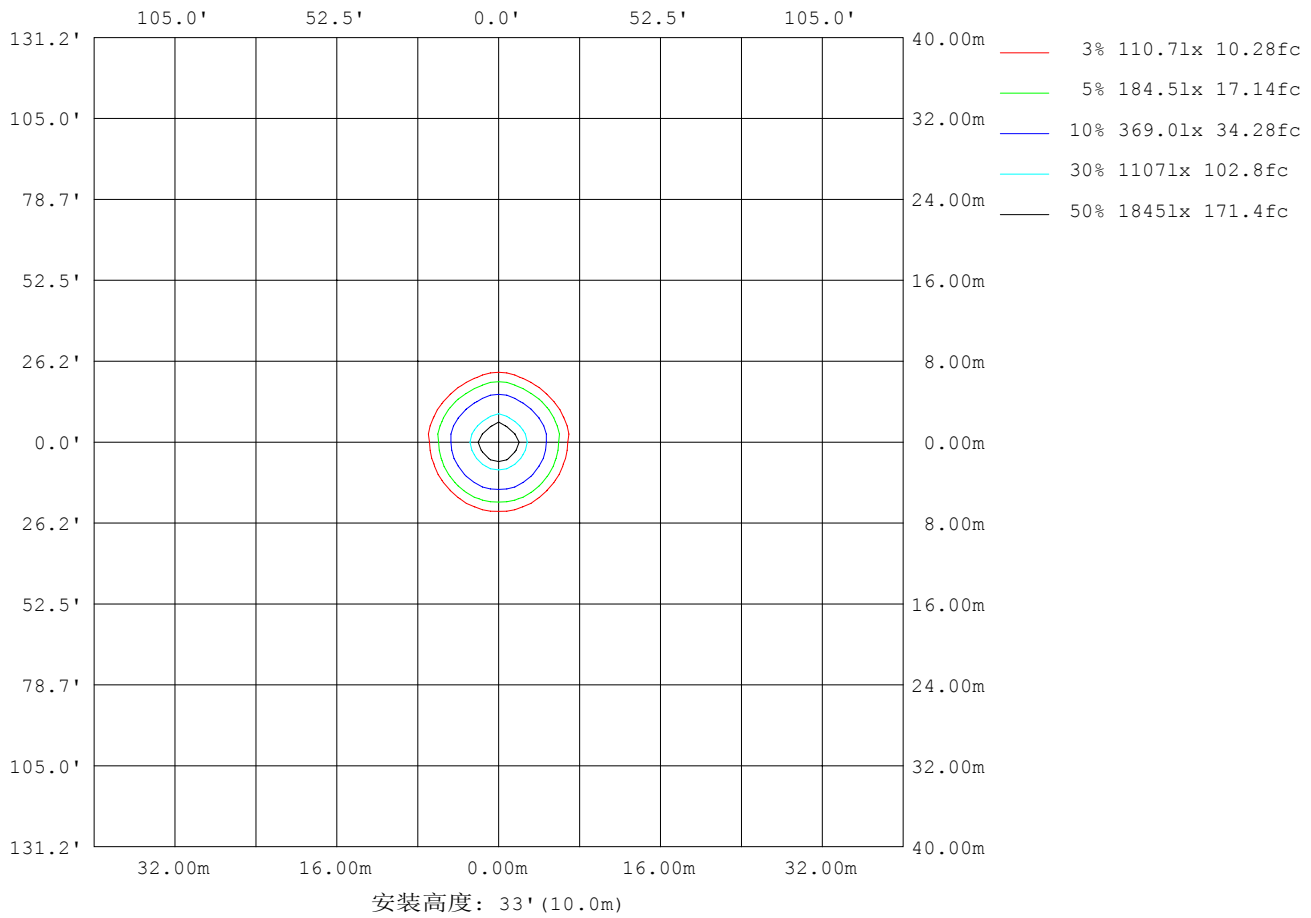

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3°C  
 测试人员:  
 测试日期: 2019-05-16

Y角度范围: 0度 - 90度  
 Y角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

## LED筒灯平均亮度报告

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.54*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度


平均亮度	数值(cd/m <sup>2</sup> )
L横(65)av	43040
L横(75)av	27248
L横(85)av	8370
L纵(65)av	47259
L纵(75)av	30427
L纵(85)av	9094
L45(65)av	45949
L45(75)av	29158
L45(85)av	6182

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度:25.3℃  
 测试人员:  
 测试日期:2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.0.362  
 环境湿度:65.0%  
 测试距离:7.684米 [K=1.0000]  
 备注:

## 平面照度曲线

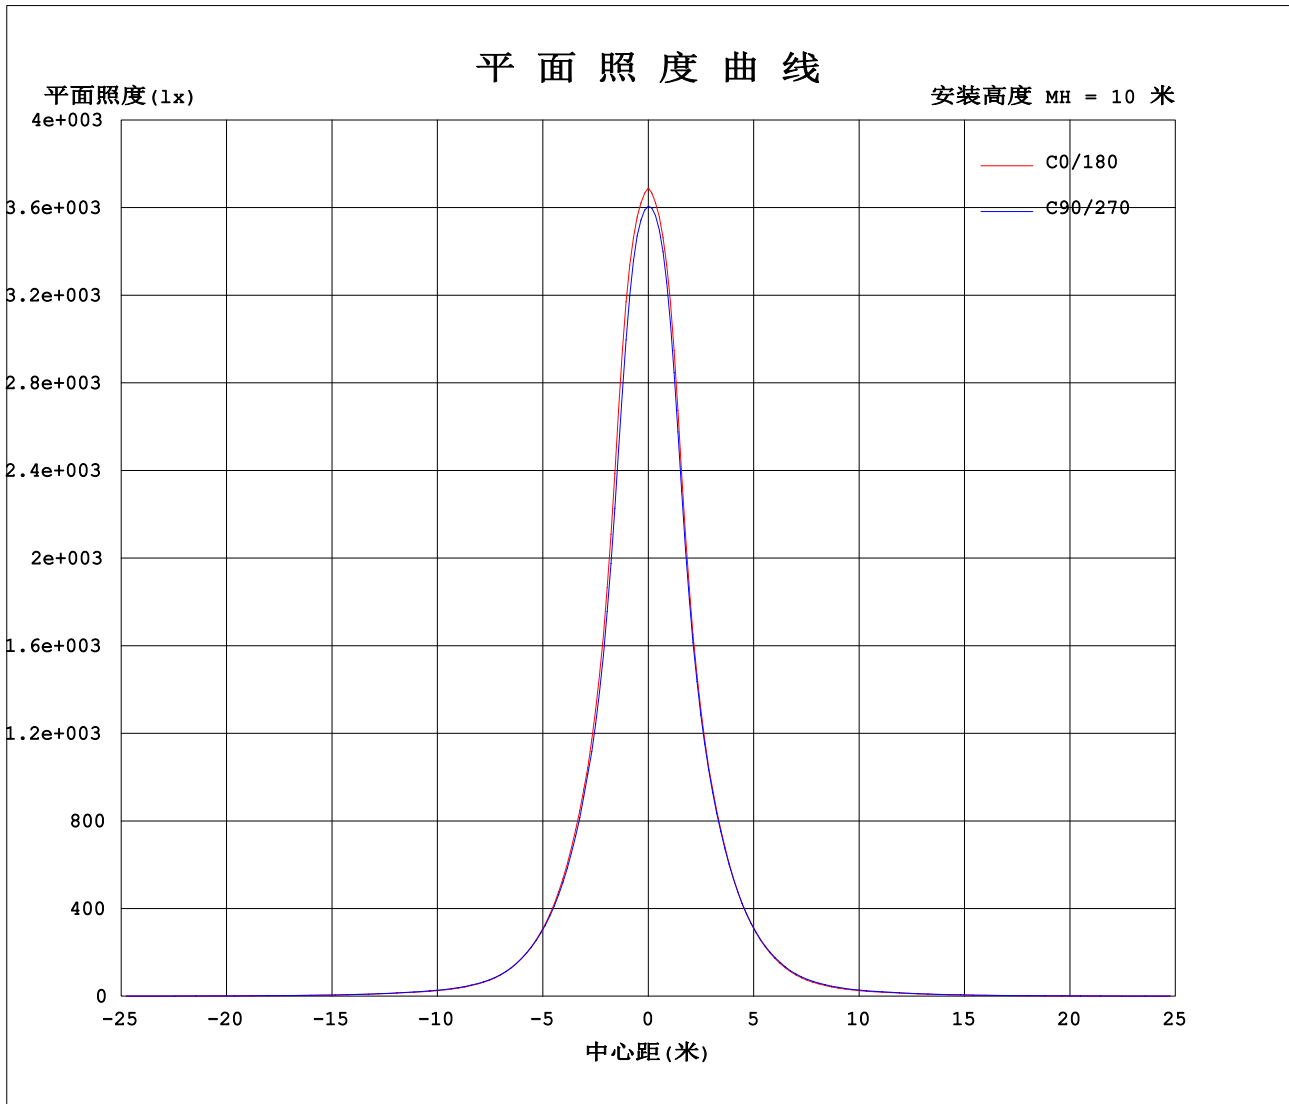

C角度范围: 0度 - 360度  
C角度间隔: 5.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员:  
测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 7.684米 [K=1.0000]  
备注:

### 光强分布数据表格

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

表--1

单位: ×100cd

C (DEG) \ γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586
5	3281	3280	3250	3251	3223	3226	3198	3204	3179	3193	3179	3208	3218	3248	3233	3249	3231	3245	3217
10	2146	2149	2098	2102	2056	2061	2021	2028	1994	2013	1991	2031	2047	2090	2073	2099	2074	2095	2058
15	1265	1266	1242	1245	1225	1228	1209	1215	1198	1209	1201	1218	1226	1247	1237	1251	1240	1251	1233
20	796	798	784	787	775	780	769	775	765	772	766	778	783	796	790	798	789	797	785
25	489	492	482	486	480	484	477	482	476	481	478	486	489	499	493	498	493	498	490
30	296	298	293	297	293	296	292	296	292	296	294	300	302	308	305	308	304	307	301
35	172	173	170	172	170	172	170	172	169	172	171	175	177	182	180	182	179	181	179
40	107	107	106	107	106	107	107	108	107	108	109	111	112	113	114	114	114	115	114
45	71.8	72.4	71.9	72.5	72.2	73.3	73.1	74.0	73.4	74.3	74.4	75.9	76.5	77.7	77.3	78.5	78.2	79.0	78.3
50	54.2	54.7	54.3	54.8	54.5	55.1	54.5	55.1	54.9	55.7	55.5	56.5	56.9	58.2	58.0	58.9	58.5	59.2	58.7
55	37.1	37.6	37.3	37.6	37.2	37.6	37.5	38.0	37.8	38.2	38.2	38.9	39.1	39.8	39.8	40.6	40.3	40.7	40.2
60	26.2	26.6	26.7	26.8	26.4	26.7	26.9	27.5	26.7	27.0	27.0	28.1	28.0	28.1	28.1	28.8	28.7	28.8	28.5
65	18.2	18.5	18.2	18.5	18.3	18.5	18.6	18.7	18.5	18.7	18.7	19.1	19.5	19.6	19.5	19.9	19.8	20.1	19.7
70	11.8	11.9	11.7	11.8	11.9	12.0	11.6	11.8	11.9	12.3	12.0	12.1	12.2	12.7	12.5	12.7	12.7	13.0	12.9
75	7.05	6.95	6.84	6.94	7.00	6.95	6.75	6.86	6.91	7.10	6.95	7.01	7.10	7.43	7.49	7.45	7.43	7.61	7.72
80	3.20	3.17	3.08	3.14	3.11	3.07	2.96	3.00	2.94	2.99	2.94	3.02	3.09	3.27	3.35	3.38	3.34	3.47	3.43
85	0.73	0.72	0.64	0.64	0.58	0.58	0.55	0.56	0.54	0.55	0.54	0.57	0.57	0.61	0.59	0.62	0.63	0.71	0.73
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

### 光强分布数据表格

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

表--2

单位: ×100cd

C (DEG) \ γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586
5	3245	3231	3249	3233	3248	3218	3208	3179	3193	3179	3204	3198	3226	3223	3251	3250	3280	3281	3295
10	2095	2074	2099	2073	2090	2047	2031	1991	2013	1994	2028	2021	2061	2056	2102	2098	2149	2146	2226
15	1251	1240	1251	1237	1247	1226	1218	1201	1209	1198	1215	1209	1228	1225	1245	1242	1266	1265	1357
20	797	789	798	790	796	783	778	766	772	765	775	769	780	775	787	784	798	796	870
25	498	493	498	493	499	489	486	478	481	476	482	477	484	480	486	482	492	489	545
30	307	304	308	305	308	302	300	294	296	292	296	292	296	293	297	293	298	296	340
35	181	179	182	180	182	177	175	171	172	169	172	170	172	170	172	170	173	172	202
40	115	114	114	114	113	112	111	109	108	107	108	107	107	106	107	106	107	107	127
45	79.0	78.2	78.5	77.3	77.7	76.5	75.9	74.4	74.3	73.4	74.0	73.1	73.3	72.2	72.5	71.9	72.4	71.8	86.9
50	59.2	58.5	58.9	58.0	58.2	56.9	56.5	55.5	55.7	54.9	55.1	54.5	55.1	54.5	54.8	54.3	54.7	54.2	65.6
55	40.7	40.3	40.6	39.8	39.8	39.1	38.9	38.2	38.2	37.8	38.0	37.5	37.6	37.2	37.6	37.3	37.6	37.1	45.4
60	28.8	28.7	28.8	28.1	28.1	28.0	28.1	27.0	27.0	26.7	27.5	26.9	26.7	26.4	26.8	26.7	26.6	26.2	32.2
65	20.1	19.8	19.9	19.5	19.6	19.5	19.1	18.7	18.7	18.5	18.7	18.6	18.5	18.3	18.5	18.2	18.5	18.2	22.8
70	13.0	12.7	12.7	12.5	12.7	12.2	12.1	12.0	12.3	11.9	11.8	11.6	12.0	11.9	11.8	11.7	11.9	11.8	15.0
75	7.61	7.43	7.45	7.49	7.43	7.10	7.01	6.95	7.10	6.91	6.86	6.75	6.95	7.00	6.94	6.84	6.95	7.05	9.21
80	3.47	3.34	3.38	3.35	3.27	3.09	3.02	2.94	2.99	2.94	3.00	2.96	3.07	3.11	3.14	3.08	3.17	3.20	4.56
85	0.71	0.63	0.62	0.59	0.61	0.57	0.57	0.54	0.55	0.54	0.56	0.55	0.58	0.58	0.64	0.64	0.72	0.73	1.28
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

### 光强分布数据表格

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WofS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

表--3

单位: ×100cd

C (DEG) \ γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586
5	3291	3239	3227	3173	3167	3121	3119	3080	3093	3061	3085	3072	3157	3194	3274	3262	3276	3262	3274
10	2212	2136	2114	2041	2027	1969	1963	1916	1921	1885	1903	1883	1970	2011	2122	2100	2124	2100	2122
15	1352	1311	1303	1263	1254	1218	1217	1200	1189	1177	1172	1170	1199	1215	1270	1257	1271	1257	1270
20	866	842	836	812	807	785	780	761	760	745	747	738	763	773	806	799	805	799	806
25	544	529	526	511	508	494	491	479	478	467	468	461	476	482	502	497	502	497	502
30	338	330	328	319	316	309	307	299	296	289	290	286	294	298	310	307	309	307	310
35	202	196	195	189	187	181	179	175	175	172	172	170	175	177	184	182	184	182	184
40	127	124	123	121	120	117	116	114	114	112	111	111	112	114	117	117	117	117	117
45	86.5	84.7	84.5	82.9	82.6	80.7	80.1	78.9	78.9	78.1	77.9	77.0	78.0	78.5	80.6	79.9	80.2	79.9	80.6
50	65.1	63.9	63.4	61.8	61.2	59.8	59.5	58.5	58.2	57.3	57.4	56.9	58.2	58.9	60.5	60.0	60.2	60.0	60.5
55	45.2	44.2	43.6	42.6	42.3	41.4	41.1	40.3	40.4	39.8	39.7	39.1	40.0	40.6	41.6	41.2	41.2	41.2	41.6
60	32.2	31.5	31.1	30.5	30.8	30.0	29.4	28.8	28.9	29.0	28.6	28.0	28.6	29.0	29.7	29.0	29.0	29.0	29.7
65	22.7	22.2	22.0	21.5	21.6	20.8	20.7	20.1	20.2	19.7	19.9	19.4	19.9	20.0	20.7	20.3	20.2	20.3	20.7
70	14.8	14.6	14.5	14.2	13.8	13.4	13.5	13.4	13.1	12.6	12.6	12.7	12.9	12.9	13.3	13.3	13.3	13.3	13.3
75	9.10	8.94	8.98	8.59	8.28	8.08	8.03	7.99	7.74	7.46	7.38	7.44	7.73	7.78	8.00	7.92	8.03	7.92	8.00
80	4.46	4.34	4.31	3.99	3.81	3.61	3.54	3.41	3.35	3.18	3.18	3.19	3.47	3.54	3.74	3.69	3.68	3.69	3.74
85	1.13	1.02	0.92	0.77	0.70	0.63	0.59	0.53	0.51	0.45	0.44	0.44	0.58	0.69	0.85	0.86	0.86	0.86	0.85
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注:

### 光强分布数据表格

实测参数: U:219.0V I:3.519A P:750.7W PF:0.9740 Freq:49.99Hz 实检光通:108972x1 lm		
灯具名称: AOK-OFS	灯具类型:LED 5050灯珠	灯具重量:26KG
灯具规格:AOK-750WoFS-NV-L5-00-5070-15D-P	外型尺寸: 0.54*0.540*0.2M	测试编号:
制造厂商: AOK	发光口面:0.52*0.52m	遮光角:15度

表--4

单位: ×100cd

γ (DEG) \ C (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586	3586				
5	3194	3157	3072	3085	3061	3093	3080	3119	3121	3167	3173	3227	3239	3291	3295				
10	2011	1970	1883	1903	1885	1921	1916	1963	1969	2027	2041	2114	2136	2212	2226				
15	1215	1199	1170	1172	1177	1189	1200	1217	1218	1254	1263	1303	1311	1352	1357				
20	773	763	738	747	745	760	761	780	785	807	812	836	842	866	870				
25	482	476	461	468	467	478	479	491	494	508	511	526	529	544	545				
30	298	294	286	290	289	296	299	307	309	316	319	328	330	338	340				
35	177	175	170	172	172	175	175	179	181	187	189	195	196	202	202				
40	114	112	111	111	112	114	114	116	117	120	121	123	124	127	127				
45	78.5	78.0	77.0	77.9	78.1	78.9	78.9	80.1	80.7	82.6	82.9	84.5	84.7	86.5	86.9				
50	58.9	58.2	56.9	57.4	57.3	58.2	58.5	59.5	59.8	61.2	61.8	63.4	63.9	65.1	65.6				
55	40.6	40.0	39.1	39.7	39.8	40.4	40.3	41.1	41.4	42.3	42.6	43.6	44.2	45.2	45.4				
60	29.0	28.6	28.0	28.6	29.0	28.9	28.8	29.4	30.0	30.8	30.5	31.1	31.5	32.2	32.2				
65	20.0	19.9	19.4	19.9	19.7	20.2	20.1	20.7	20.8	21.6	21.5	22.0	22.2	22.7	22.8				
70	12.9	12.9	12.7	12.6	12.6	13.1	13.4	13.5	13.4	13.8	14.2	14.5	14.6	14.8	15.0				
75	7.78	7.73	7.44	7.38	7.46	7.74	7.99	8.03	8.08	8.28	8.59	8.98	8.94	9.10	9.21				
80	3.54	3.47	3.19	3.18	3.18	3.35	3.41	3.54	3.61	3.81	3.99	4.31	4.34	4.46	4.56				
85	0.69	0.58	0.44	0.44	0.45	0.51	0.53	0.59	0.63	0.70	0.77	0.92	1.02	1.13	1.28				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

C角度范围: 0度 - 360度  
 C角度间隔: 5.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员:  
 测试日期: 2019-05-16

γ角度范围: 0度 - 90度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 7.684米 [K=1.0000]  
 备注: