

Technical Report No.: 68.140.26.02443.01

Date: 2026-04-22

Client: Name: AOK Industrial Company Limited
Address: 1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA

Manufacturer: Name: Same as client
Address: Same as client

Factory: Name: Same as client
Address: Same as client

Test object: Product: Flood lights
(LED Flood Light)

Model: AOK-ZWFLC(M)-NV-A5-BB-XXYY-BN-P;
AOK-ZWFLC(L)-NV-A5-BB-XXYY-BN-P;
AOK-ZWFLC(XL)-NV-A5-BB-XXYY-BN-P;
AOK-ZWFLC(M)-NV-L5-BB-XXYY-BN-P;
AOK-ZWFLC(L)-NV-L5-BB-XXYY-BN-P;
AOK-ZWFLC(XL)-NV-L5-BB-XXYY-BN-P;
AOK-ZWFLC(M)-NV-L3-BB-XXYY-BN-P;
AOK-ZWFLC(L)-NV-L3-BB-XXYY-BN-P ;
(‘Z’ stands for Rated Power, can be 20-500, in steps of 1W, e.g. 20=20W, 500=500W;
‘BB’ stands for whether with Zhaga socket & sealing cap, can be 00 and SN, 00= without Zhaga socket & sealing cap, SN= with Zhaga socket & sealing cap;
‘XX’ stands for CCT of LED, can be 27, 30, 40, 50, 57 and 65, 27=2700K, 30=3000K, 40=4000K, 50=5000K, 57=5700K, 65=6500K;
‘YY’ stands for CRI (color rendering index), can be 70 and 80, 70=Ra: 70, 80=Ra: 80;
‘P’ stands for internal code, can be A, B, C)

Trade mark:



Test specification: Mechanical strength test (IK08) according to IEC 62262:2002, IEC 62262:2002/AMD1:2021, EN 62262:2002+A1:2021

Purpose of examination: Testing and evaluation according to the test specification

Test result: The test results show that the presented products are in compliance with the above listed test specifications.

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see Testing, Certification, Validation and Verification Regulations, chapter A-3.3.

1. Description of the test object

1.1 Picture(s)

See 'Appendix 2 Photo document' for details

Report No.: 68.140.26.02443.01
Rev.: 00
Date: 2026-04-22

www.tuvsud.com



TÜV SÜD Certification and Testing (China) Co., Ltd.
Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District, Shenzhen,
Guangdong 518052, China
Telephone : +86 755 8828 6998
Telefax : +86 755 8828 5299

1.2 Function

Manufacturer's specification for intended use:
Fixed for indoor and outdoor use.

1.3 Consideration of the foreseeable use

- ☐ Not applicable
- ☒ Covered through the applied standard
- ☐ Covered by the following comment*
- ☐ Covered by attached risk analysis

*

1.4 Technical Data

Flood lights (LED Flood Light)

Rated Input : 120-277VAC; 50/60Hz
Rated Power : See 'Appendix 1 Model list' for details
Degree of Protection : IP66

2. Order

2.1 Date of Purchase Order, Customer's Reference

2026-03-04

2.2 Test Sample(s)

- Reception date(s): 2026-03-04
- Location(s) of reception: TÜV SÜD Certification and Testing (China) Co., Ltd.
Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business
Park, Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong 518052, China
- Condition of test sample(s): Good

2.3 Testing

- Testing date(s): 2026-03-04 to 2026-04-22
- Location(s) of testing: TÜV SÜD Certification and Testing (China) Co., Ltd.
Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business
Park, Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong 518052, China

2.4 Points of Non-Compliance or Exceptions of the Test Procedure

- None

3. Test Results

- Decision rule according to IEC Guide 115:2023, clause 4.3.3 Simple acceptance was applied.

3.1 Positive Test Results

Mechanical strength test (IK08) for glass cover, sealing cap and metal enclosure, as below:

IEC/EN 62262			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL TEST REQUIREMENTS		—
5.1	Ambient temperature		—
	Air pressure		—
5.3	Product standard		—
	EN 60598-1:2015+A1:2018		—
	Test equipment/ striking element used (IEC 60068-2-75)	Vertical hammer	P
	Number of samples tested (TR 62696)	1	P
	Specially prepared luminaire	N	P
	Condition of mounting (set-up) (ceiling mounted, floor, vertical wall mounted)	Floor	P
	Appliance energised		N/A
	Number of impacts (TR 62696)	3	P
	CLASSIFICATION OF LUMINAIRES		—
	IK 01/0.14J		N/A
	IK 02/0.2J		N/A
	IK 03/0.35J		N/A
	IK 04/0.5J		N/A
	IK 05/0.7J		N/A
	IK 06/1J		N/A

	IK 07/2J		N/A
	IK 08/5J		P
	IK 09/10J		N/A
	IK 10/20J		N/A
	IK 11/50J		N/A
	Degree of protection.....: IP66		—
4	Condition of acceptance		—
4.1	Safety of the luminaire maintained as 4.13 of EN 60598-1?		P
	IP rating retested		P
	Fixing to the mounting surface remain safe		N/A
	No safety critical damage enclosure / optics		P
	No parts detached		P
4.2	Protection of light source still provided		P
	Basic functioning maintained		P

Picture appliance before test with point of impact verified

Test part	Impact point	Impact energy (J)	Test result	Verdict
Glass cover	[1]; [2]	5	No damage	Pass
sealing cap	[3]; [4]	5	No damage	Pass
Metal enclosure	[5]; [6]; [7]	5	No damage	Pass

Impact point view for test model AOK-150WiLH-NV-A5-00-6570-T221-P



Report No.: 68.140.26.02443.01
Rev.: 00
Date: 2026-04-22

www.tuvsud.com

TUV[®]

TÜV SÜD Certification and Testing (China) Co., Ltd.
Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District, Shenzhen,
Guangdong 518052, China
Telephone : +86 755 8828 6998
Telefax : +86 755 8828 5299

3.2 Points of Non-Compliance according to the test specification

- None

4. Test History

- None

5. Remarks

All models have similar construction.

The terminal block on supply cord is optional.

There are four constructions for all models as below:

For models BB=00	Construction 1	without Zhaga socket & sealing cap
For models BB=SN	Construction 2	with Zhaga socket & sealing cap (Top enclosure)
	Construction 3	with Zhaga socket & sealing cap (Bottom enclosure)
	Construction 4	with Zhaga socket & sealing cap (Top enclosure and Bottom enclosure)

Model AOK-500WFLC(L)-NV-A5-SN-6570-BN-B (Construction 4: with Zhaga socket & sealing cap (Top enclosure and Bottom enclosure)) was chosen as representative model to perform this test.

6. Summary

The test specifications are met.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch TÜV SÜD Group

Tested by:


Jared Jiang, Project Handler

Approved by:


Sunny Yan, Designated Reviewer



Appendix 1 Model list:

Model No.	'Z' can be 20 to 500 which stands for Rated Power 20W to 500W, in steps of 1W	Rated Power (W)	LED driver		LED type	Size (mm)	Weight (kg)	Max. projected area (m ²)
AOK-ZWFLC(M)-NV-A5-BB-XXYY-BN-P	Z=20 to 50	20-50	SS-80NH-V300BHB	SS-80NH-V300F	TYF 5050	409*245*58	3,4	0,100
	Z=51 to 100	51-100	SS-100NH-V300BHB	SS-100NH-V300F				
	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F				
	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F				
AOK-ZWFLC(L)-NV-A5-BB-XXYY-BN-P	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F		480*295*58	5,2	0,142
	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F				
	Z=241 to 300	241-300	SS-320NH-V300BHB	SS-320NH-V300F				
	Z=301 to 400	301-400	SS-200NH-V300BHB*2	SS-200NH-V300F*2				
AOK-ZWFLC(XL)-NV-A5-BB-XXYY-BN-P	Z=401 to 500	401-500	SS-320NH-V300BHB*2	SS-320NH-V300F*2				
	Z=241 to 300	241-300	SS-320NH-V300BHB	SS-320NH-V300F		590*347*70	7,5	0,205
	Z=301 to 400	301-400	SS-200NH-V300BHB*2	SS-200NH-V300F*2				
	Z=401 to 500	401-500	SS-320NH-V300BHB*2	SS-320NH-V300F*2				
	Z=20 to 50	20-50	SS-80NH-V300BHB	SS-80NH-V300F				
AOK-ZWFLC(M)-NV-L5-BB-XXYY-BN-P	Z=51 to 100	51-100	SS-100NH-V300BHB	SS-100NH-V300F	Lumileds 5050	409*245*58	3,4	0,100
	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F				
	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F				
	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F		480*295*58	5,2	0,142
AOK-ZWFLC(L)-NV-L5-BB-XXYY-BN-P	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F				
	Z=241 to 300	241-300	SS-320NH-V300BHB	SS-320NH-V300F				
	Z=301 to 400	301-400	SS-200NH-V300BHB*2	SS-200NH-V300F*2				
	Z=401 to 500	401-500	SS-320NH-V300BHB*2	SS-320NH-V300F*2				
AOK-ZWFLC(XL)-NV-L5-BB-XXYY-BN-P	Z=241 to 300	241-300	SS-320NH-V300BHB	SS-320NH-V300F		590*347*70	7,5	0,205
	Z=301 to 400	301-400	SS-200NH-V300BHB*2	SS-200NH-V300F*2				
	Z=401 to 500	401-500	SS-320NH-V300BHB*2	SS-320NH-V300F*2				
	Z=20 to 50	20-50	SS-80NH-V300BHB	SS-80NH-V300F	Lumileds 3030 2D	409*245*58	3,4	0,100
AOK-ZWFLC(M)-NV-L3-BB-XXYY-BN-P	Z=51 to 100	51-100	SS-100NH-V300BHB	SS-100NH-V300F				
	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F				

Technical Report



AOK-ZWFLC(L)-NV-L3-BB-XXYY-BN-P	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F				
	Z=101 to 150	101-150	SS-150NH-V300BHB	SS-150NH-V300F				
	Z=151 to 200	151-200	SS-200NH-V300BHB	SS-200NH-V300F				
	Z=201 to 240	201-240	SS-240NH-V300BHB	SS-240NH-V300F		480*295*58	5,2	0,142

Remark 1:

‘Z’ stands for Rated Power, can be 20-500, in steps of 1W, e.g. 20=20W, 500=500W;

‘BB’ stands for whether with Zhaga socket & sealing cap, can be 00 and SN, 00= without Zhaga socket & sealing cap, SN= with Zhaga socket & sealing cap;

‘XX’ stands for CCT of LED, can be 27, 30, 40, 50, 57 and 65, 27=2700K, 30=3000K, 40=4000K, 50=5000K, 57=5700K, 65=6500K;

‘YY’ stands for CRI (color rendering index), can be 70 and 80, 70=Ra: 70, 80=Ra: 80;

‘P’ stands for internal code, can be A, B, C

Remark 2: LED types TYF 5050, Lumileds 5050 and Lumileds 3030 2D stand for different LED type; TYF 5050=TS1-H50YL-0801BB, Lumileds 5050=L150-AAAA50BBCCCC, Lumileds 3030 2D=L130-AABB003000C2D

Report No.: 68.140.26.02443.01

Rev.: 00

Date: 2026-04-22

www.tuvsud.com



TÜV SÜD Certification and Testing (China) Co., Ltd.
Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District, Shenzhen,
Guangdong 518052, China
Telephone : +86 755 8828 6998
Telefax : +86 755 8828 5299

Appendix 2 Photo document


Details of: Front view for AOK-100WFLC(M)-NV-A5-00-5070-BN-B (Representative model)

Remark: Construction 1: without Zhaga socket & sealing cap; without terminal block on supply cord



Details of: Back view for AOK-100WFLC(M)-NV-A5-00-5070-BN-B (Representative model)

Remark: Construction 1: without Zhaga socket & sealing cap; without terminal block on supply cord

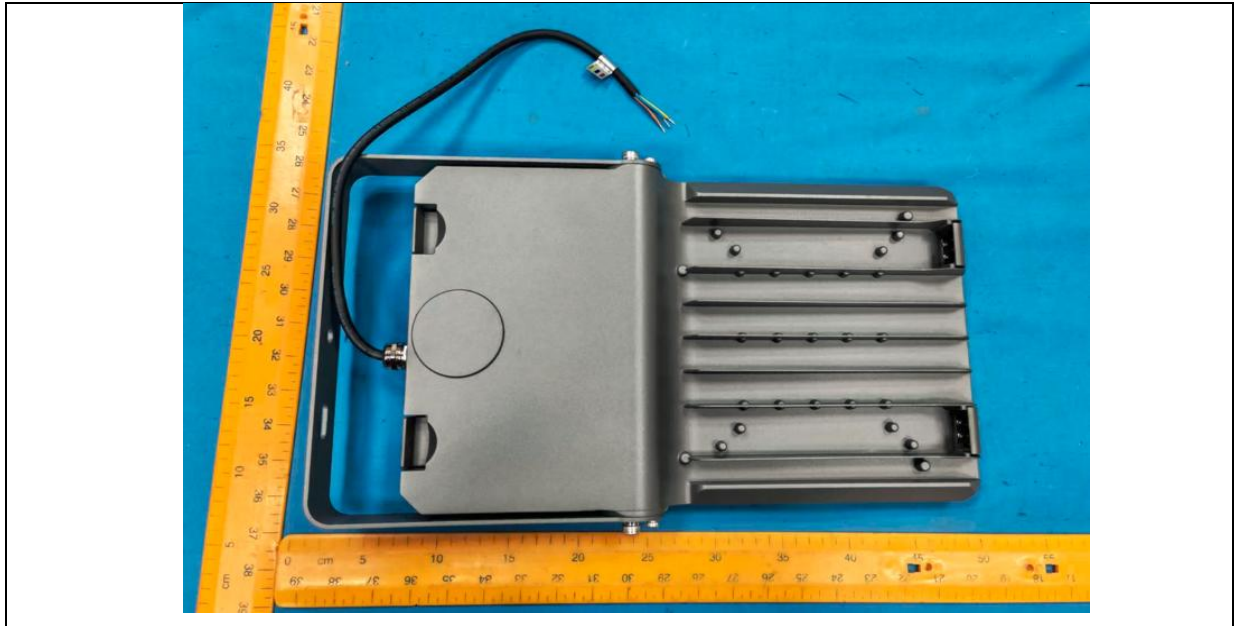


Details of: Front view for AOK-240WFLC(L)-NV-A5-00-5070-BN-B (Representative model)
 Remark: Construction 1: without Zhaga socket & sealing cap; without terminal block on supply cord



Details of: Back view for AOK-240WFLC(L)-NV-A5-00-5070-BN-B (Representative model)
 Remark: Construction 1: without Zhaga socket & sealing cap; without terminal block on supply cord




Details of: Front view for AOK-500WFLC(XL)-NV-A5-SN-5070-BN-B (Representative model)
 Remark: Construction 4: with Zhaga socket & sealing cap (Top enclosure and Bottom enclosure);
 with terminal block on supply cord

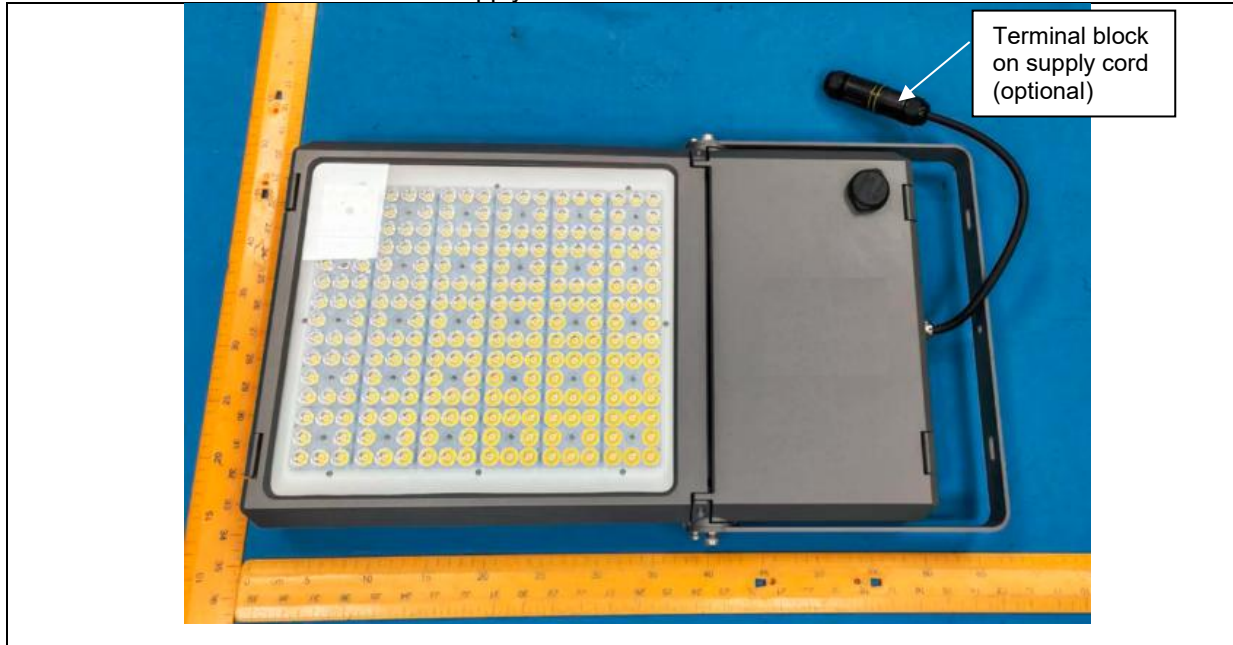


Details of: Back view for AOK-500WFLC(XL)-NV-A5-SN-5070-BN-B (Representative model)
 Remark: Construction 4: with Zhaga socket & sealing cap (Top enclosure and Bottom enclosure);
 with terminal block on supply cord



Details of: Internal view for AOK-500WFLC(XL)-NV-A5-SN-5070-BN-B (Representative model)
 Remark:

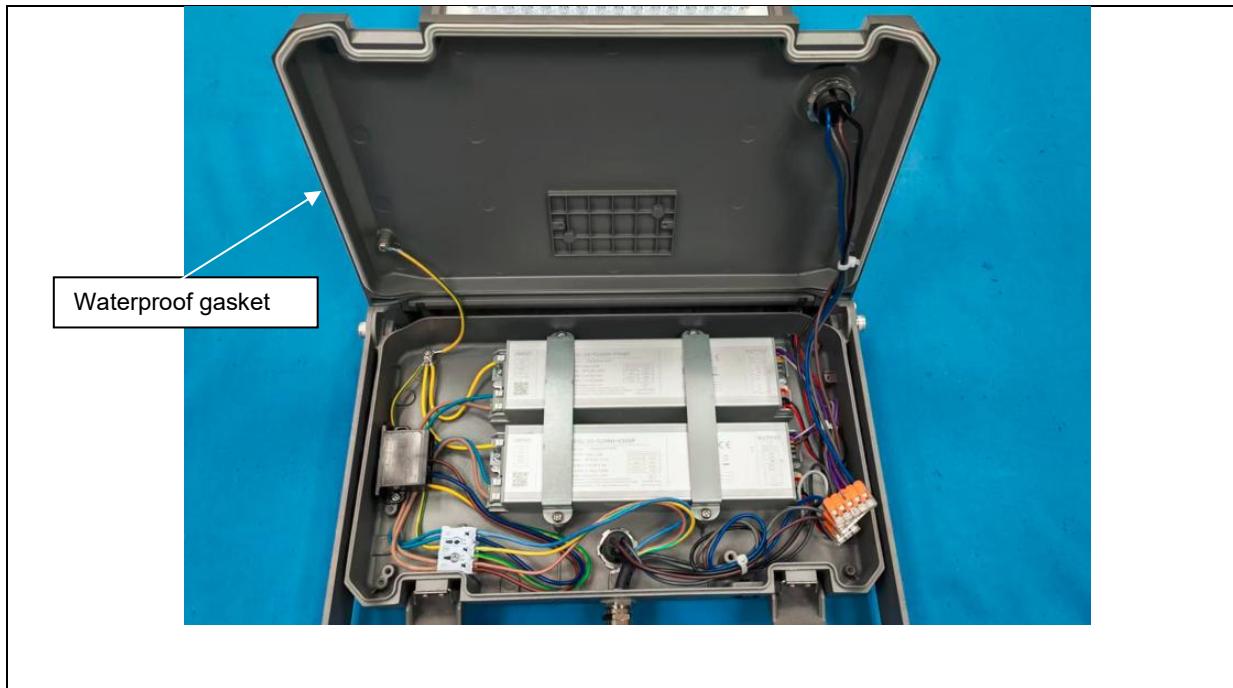


Details of: Internal view for AOK-500WFLC(XL)-NV-A5-SN-5070-BN-B (Representative model)
 Remark:

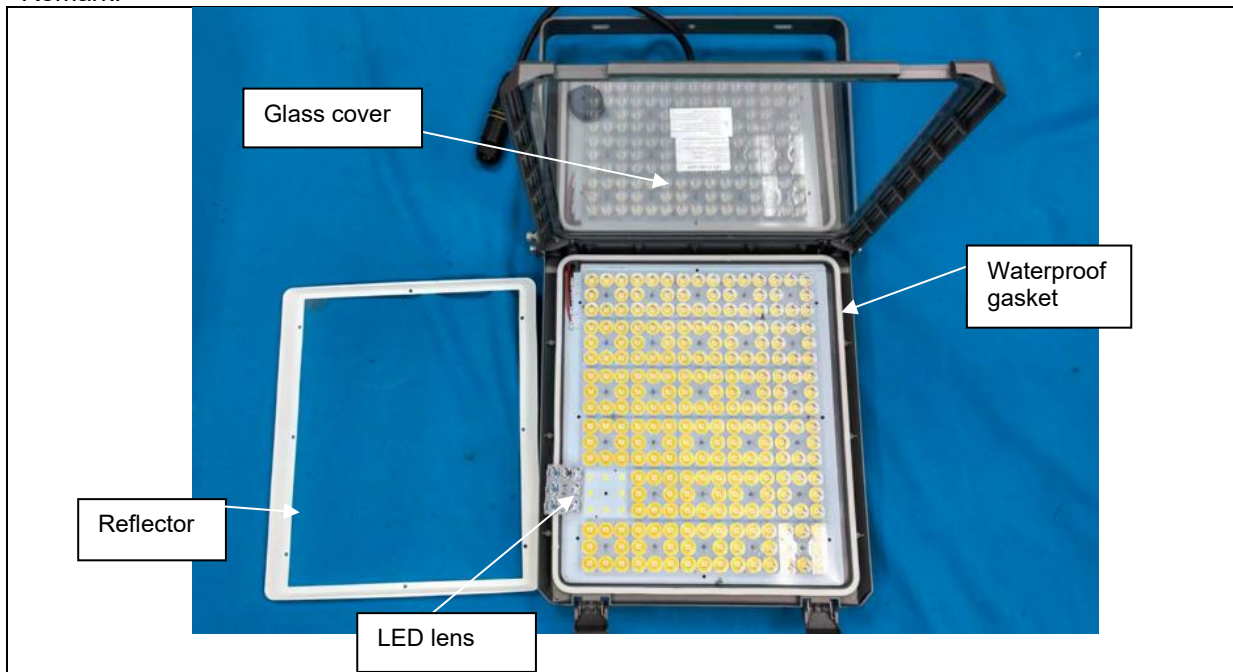

Details of: Zhaga socket & sealing cap view for AOK-500WFLC(XL)-NV-A5-SN-5070-BN-B
(Representative model)

Remark:

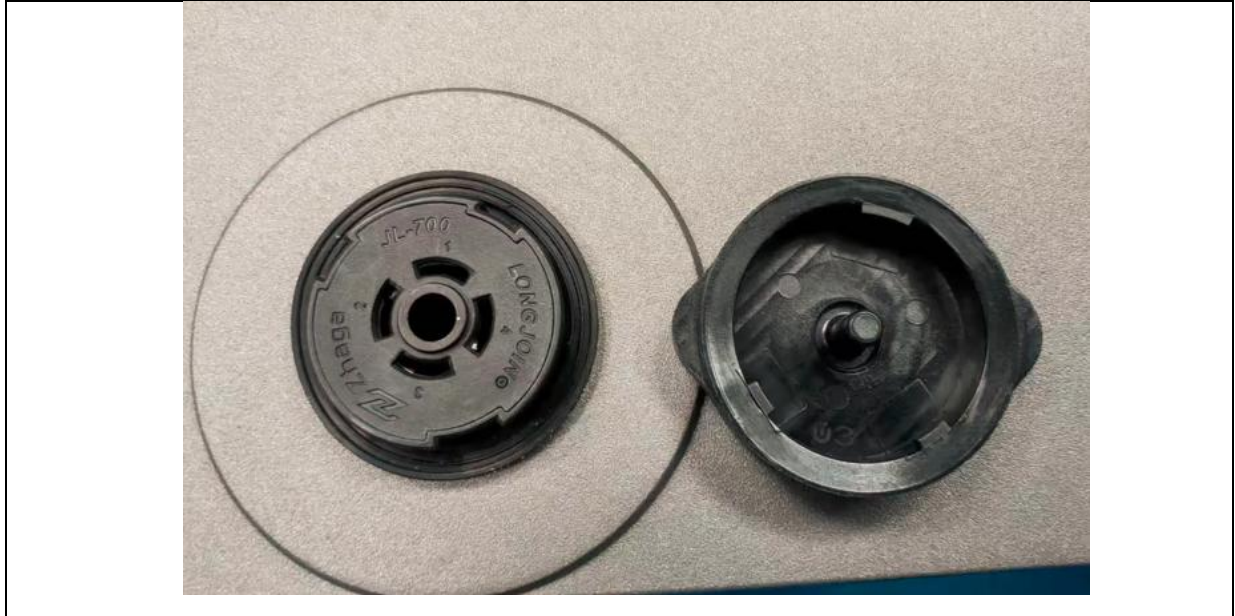

Details of: Terminal block on supply cord internal view

Remark:



--- End of Report ---