


室内灯具光度数据

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 177.77 lm/W
型号	2835	峰值光强(cd)	8695	S/MH(C0/180)	0.99	
标称功率(W)	65	灯具效率(%)	100.0	S/MH(C90/270)	0.99	
额定电源电压(V)	220	总光通量(lm)	11420	η UP,DN(C0-180)	0.0,50.3	
额定光通量(lm)	11420	CIE分类	直接	η UP,DN(C180-360)	0.0,49.7	
灯具内光源数(只)	1	上射光通比(%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压(V)	220	下射光通比(%)	100.0	CIBSE SHR MAX	1.00	

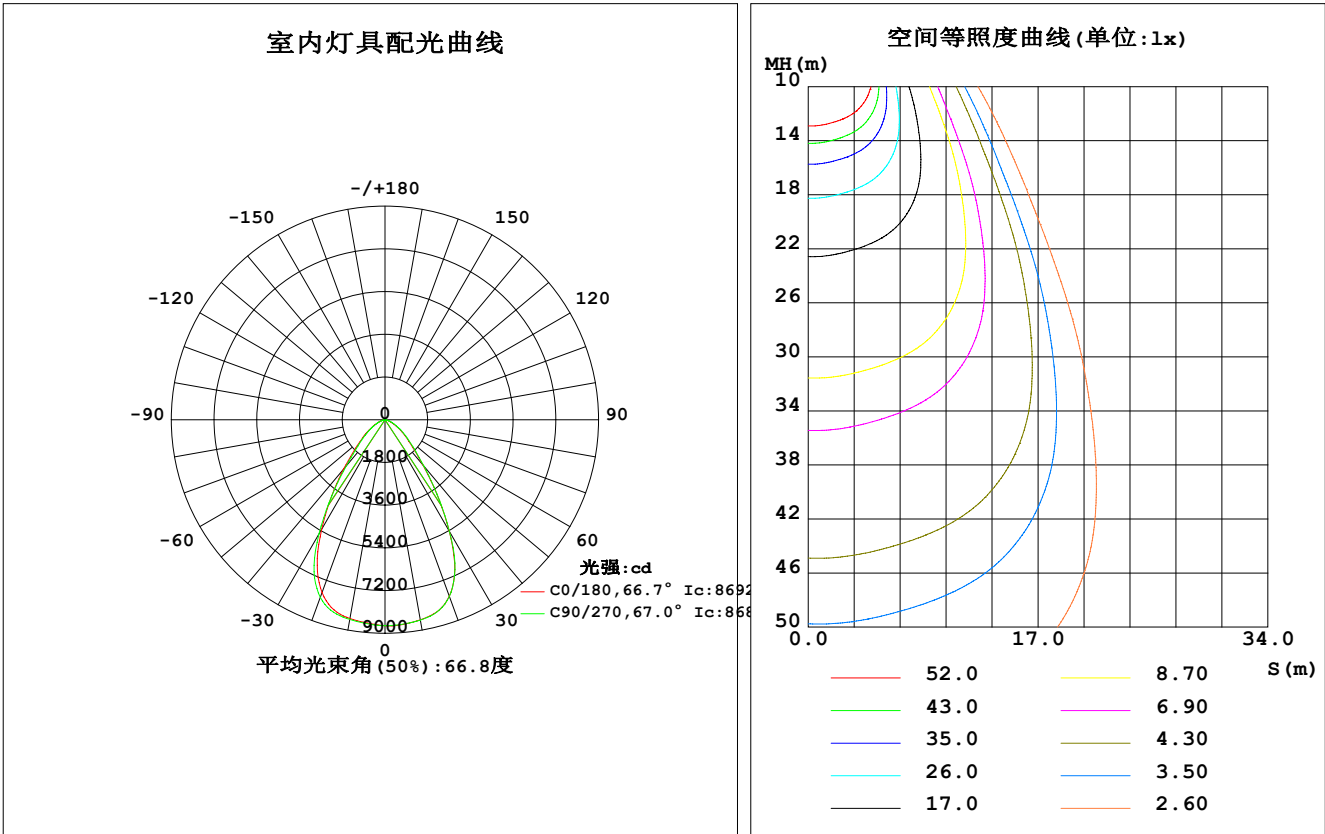

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	8560	8599	8573	8511	8505	8536	8543	8542	0- 10	821.4	821.4	7.19, 7.19
20	7917	8033	7927	7789	7749	7893	7966	7878	10- 20	2349	3171	27.8, 27.8
30	5407	5526	5432	5348	5341	5454	5574	5304	20- 30	3131	6302	55.2, 55.2
40	2480	2529	2552	2718	2719	2525	2534	2578	30- 40	2409	8710	76.3, 76.3
50	1191	1160	1256	1384	1301	1157	1216	1248	40- 50	1371	10081	88.3, 88.3
60	566.4	567.7	622.4	688.7	644.5	566.9	593.2	600.3	50- 60	784.8	10866	95.1, 95.1
70	217.6	229.2	250.4	279.2	259.4	230.6	228.0	225.8	60- 70	390.8	11257	98.6, 98.6
80	54.94	59.48	71.40	81.93	78.92	57.70	56.46	46.49	70- 80	142.1	11399	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	21.21	11420	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	11420	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	11420	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	11420	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	11420	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	11420	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	11420	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	11420	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	11420	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	11420	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：9492.6 lm

%lum = 83.1%

%lamp = 83.1%

锥面光通量(120度)：10866 lm

%lum = 95.1%


%lamp = 95.1%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

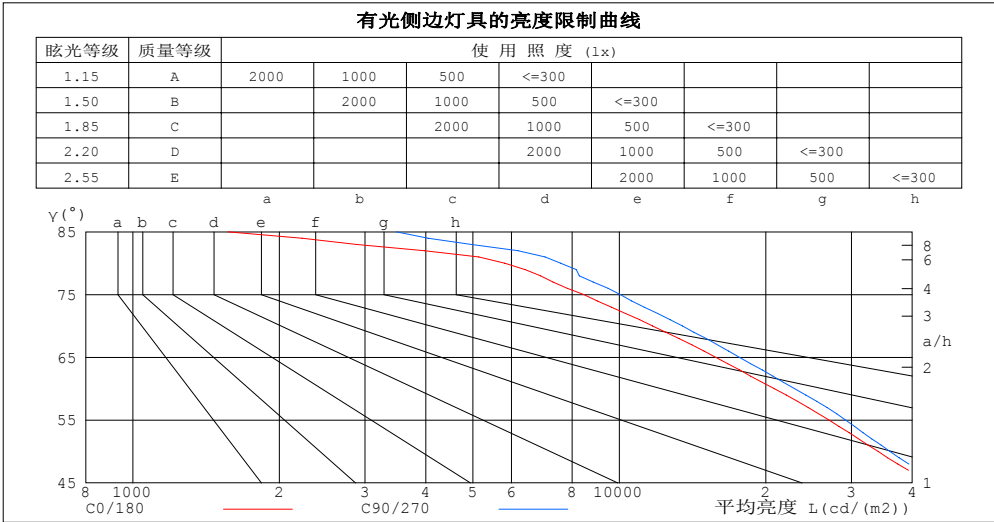

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	1567	3480
80	5815	7572
75	8450	10044
70	11695	13483
65	15784	17649
60	20820	22925
55	26978	29168
50	34063	35997
45	43605	45545


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: Φ263mm	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.99	.95	.91	.98	.93	.89	.94	.91	.88	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.73	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.67	.64	.71	.66	.63	.61
6.0	.71	.64	.59	.70	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.53	.50	.58	.53	.49	.48
9.0	.58	.51	.46	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.47	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

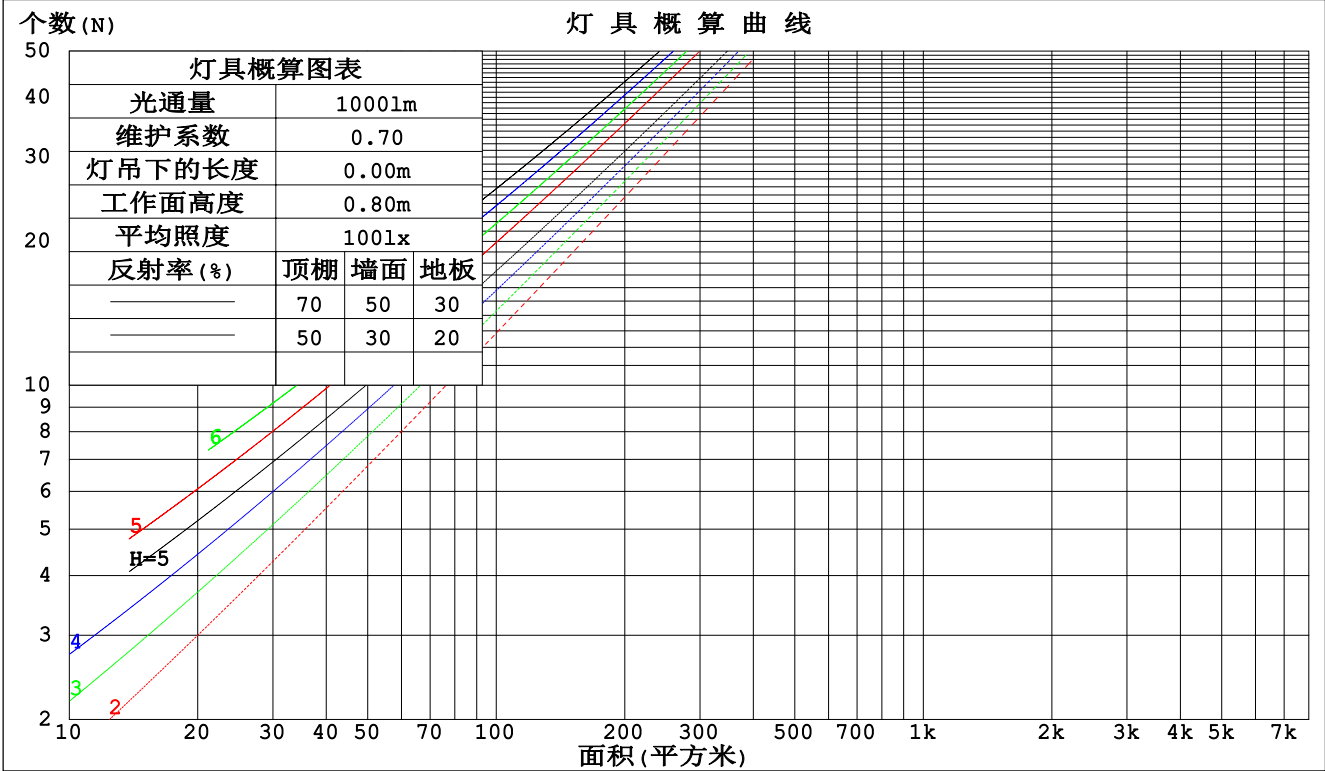

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.212	.121	.038	.206	.117	.037	.193	.111	.035	.181	.104	.034	.170	.099	.032	
2.0	.205	.113	.035	.200	.110	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030	
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.181	.095	.028	.172	.091	.027	.165	.088	.027	.158	.086	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.081	.024	
6.0	.166	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.149	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.018	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.108	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.012	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.025	.090	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	22.6	23.7	22.8	23.9	24.1	22.8	24.0	23.1	24.1	24.3
3H	22.8	23.8	23.1	24.1	24.3	23.1	24.2	23.4	24.4	24.6
4H	22.8	23.8	23.1	24.1	24.3	23.2	24.2	23.5	24.4	24.6
6H	22.8	23.7	23.1	24.0	24.2	23.2	24.1	23.5	24.4	24.6
8H	22.8	23.7	23.1	23.9	24.2	23.2	24.1	23.5	24.3	24.6
12H	22.7	23.6	23.1	23.9	24.2	23.1	24.0	23.5	24.3	24.5
4H 2H	22.6	23.6	22.9	23.9	24.1	22.9	23.9	23.2	24.1	24.3
3H	23.0	23.8	23.3	24.1	24.4	23.3	24.2	23.6	24.4	24.7
4H	23.1	23.8	23.4	24.2	24.5	23.4	24.2	23.8	24.5	24.8
6H	23.1	23.8	23.5	24.1	24.5	23.5	24.1	23.8	24.5	24.8
8H	23.1	23.7	23.5	24.0	24.4	23.4	24.1	23.8	24.4	24.8
12H	23.0	23.6	23.4	24.0	24.4	23.4	24.0	23.8	24.4	24.8
8H 4H	23.0	23.7	23.4	24.0	24.4	23.4	24.0	23.8	24.3	24.7
6H	23.1	23.6	23.5	24.0	24.4	23.4	23.9	23.9	24.3	24.8
8H	23.1	23.5	23.5	23.9	24.4	23.4	23.9	23.9	24.3	24.8
12H	23.0	23.4	23.5	23.8	24.3	23.4	23.8	23.9	24.2	24.7
12H 4H	23.0	23.6	23.4	23.9	24.3	23.3	23.9	23.7	24.3	24.7
6H	23.0	23.5	23.5	23.9	24.4	23.4	23.9	23.8	24.3	24.7
8H	23.0	23.4	23.5	23.9	24.3	23.4	23.8	23.9	24.2	24.7
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 1.1 / - 1.6					+ 1.0 / - 1.4				
1.5H	+ 1.6 / - 0.9					+ 1.5 / - 0.9				
2.0H	+ 1.9 / - 1.7					+ 1.9 / - 1.7				

依据CIE Pub.117计算, 11420lm光源光通, 表格已经进行修正(8log(F/F0) = 8.5)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	77	68	63	76	68	63	75	68	63	58
0.80	85	77	73	85	77	72	83	76	72	67
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	85	96	89	85	94	88	84	79
1.50	100	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	100	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 $SHR_{NOM} = 1.25$			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

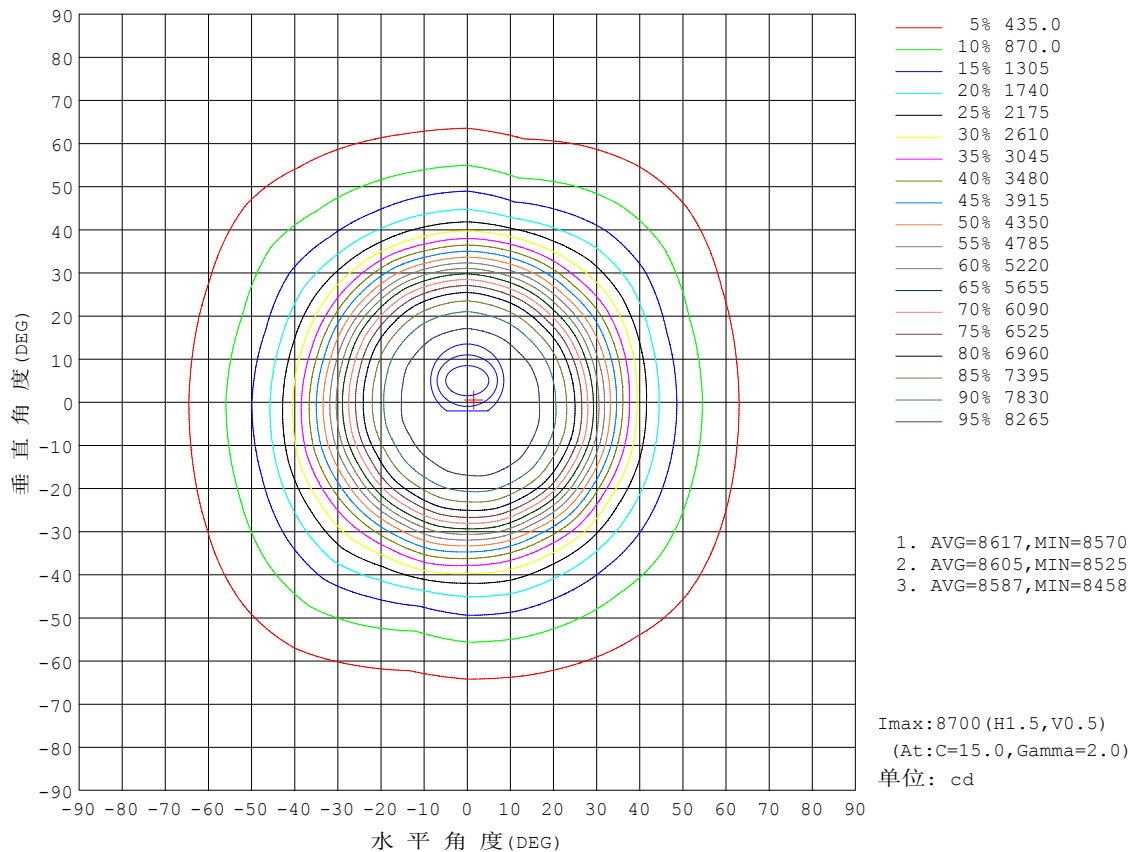


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

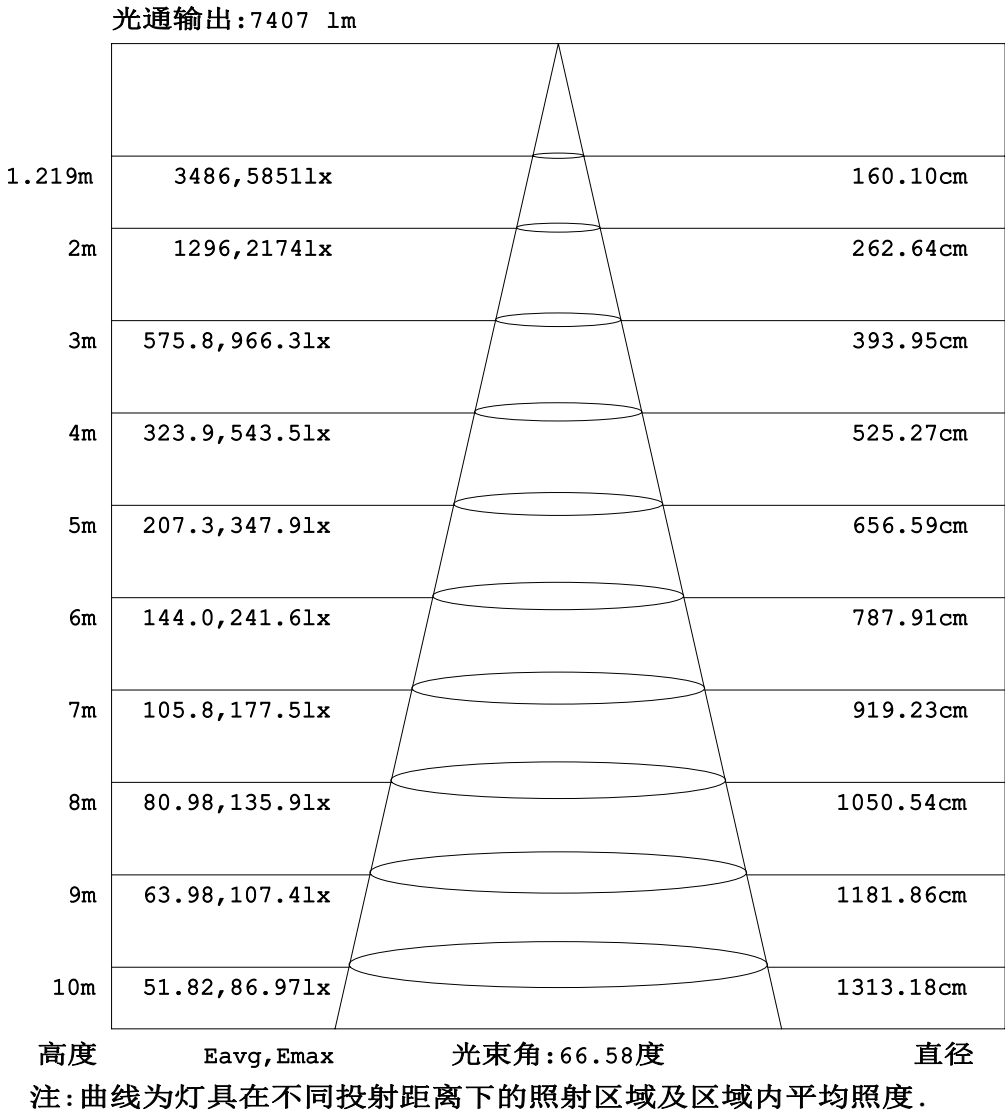


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

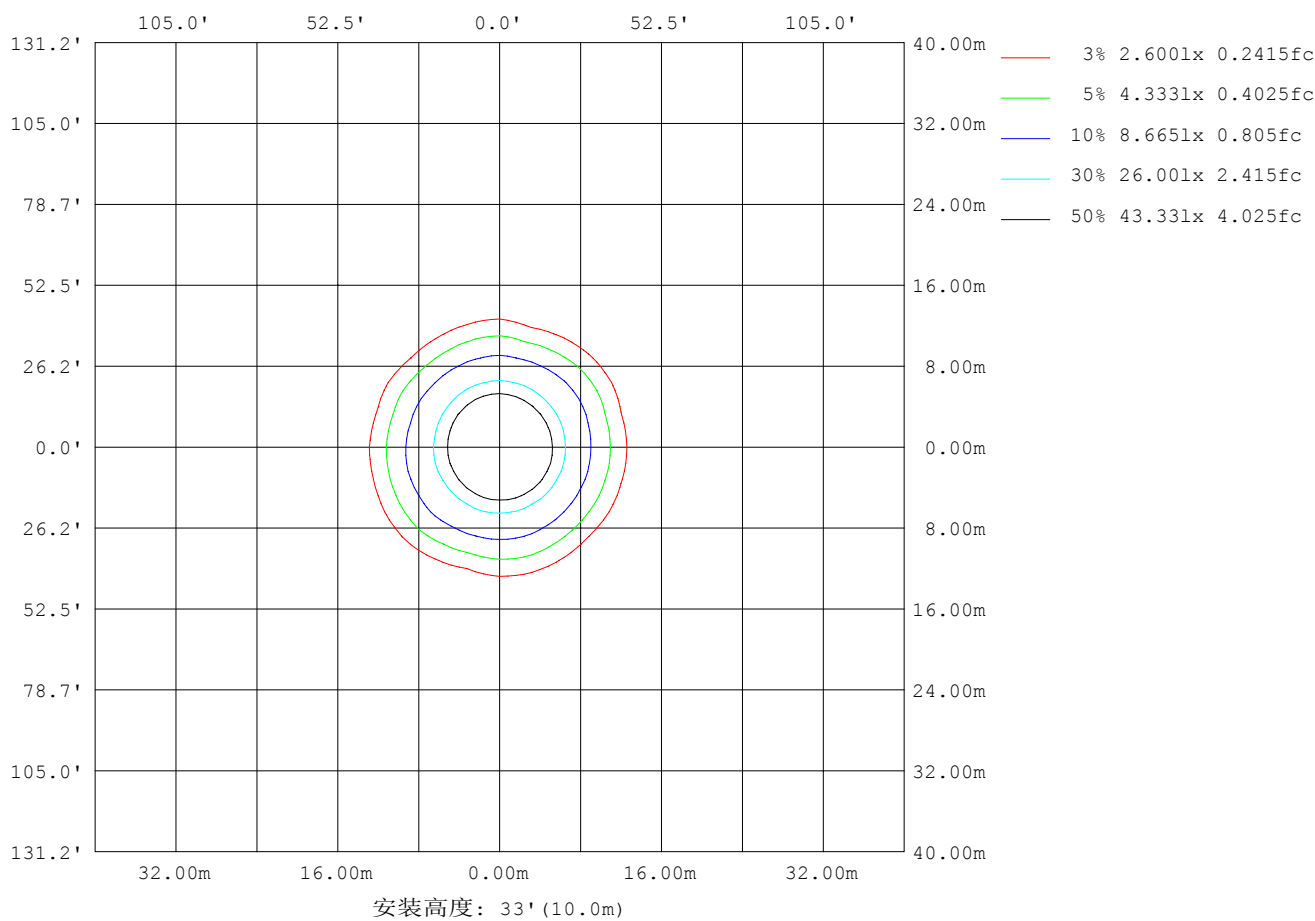

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	17001
L横 (75) av	9454
L横 (85) av	2758
L纵 (65) av	17116
L纵 (75) av	9416
L纵 (85) av	2659
L45 (65) av	17174
L45 (75) av	9125
L45 (85) av	3581

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

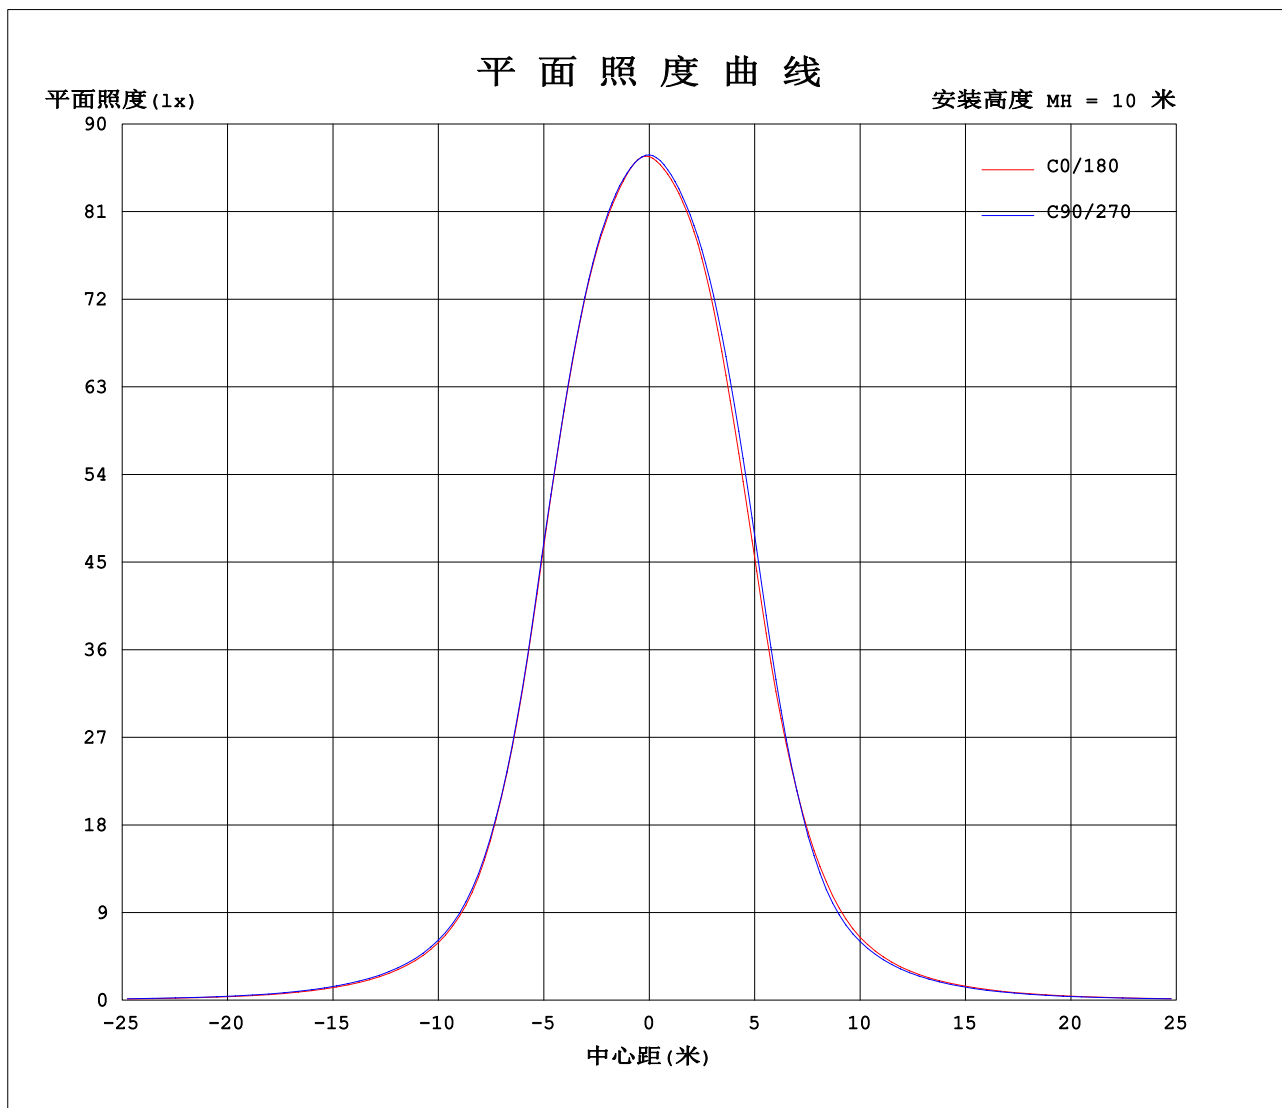

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--1		单位: cd																		
C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	
0	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	8680	
5	8660	8671	8671	8675	8667	8660	8647	8636	8622	8612	8603	8600	8597	8601	8605	8608	8617	8620	8626	
10	8560	8580	8586	8599	8596	8595	8573	8555	8527	8511	8501	8506	8505	8515	8529	8536	8540	8541	8543	
15	8392	8420	8425	8450	8443	8442	8399	8376	8331	8310	8285	8295	8297	8313	8353	8362	8383	8384	8394	
20	7917	7980	7989	8033	8005	8001	7927	7893	7813	7789	7729	7746	7749	7778	7855	7893	7945	7947	7966	
25	6961	7070	7064	7119	7057	7077	6972	6963	6856	6837	6743	6773	6763	6779	6892	6939	7039	7040	7071	
30	5407	5527	5468	5526	5429	5515	5432	5463	5345	5348	5282	5356	5341	5311	5417	5454	5579	5548	5574	
35	3807	3808	3757	3827	3756	3827	3829	3911	3809	3814	3867	3964	3921	3810	3830	3853	3933	3860	3914	
40	2480	2504	2439	2529	2501	2586	2552	2632	2573	2718	2719	2804	2719	2597	2568	2525	2507	2499	2534	
45	1678	1690	1669	1666	1706	1777	1749	1676	1764	1946	1906	1890	1835	1753	1755	1650	1634	1671	1706	
50	1191	1179	1189	1160	1207	1258	1256	1146	1246	1384	1359	1296	1301	1222	1248	1157	1145	1184	1216	
55	842	838	851	828	865	905	908	813	905	992	975	919	930	858	897	818	825	837	866	
60	566	568	579	568	593	622	622	560	625	689	675	632	645	591	620	567	568	569	593	
65	363	366	374	373	388	405	405	368	406	449	440	413	418	386	403	372	372	372	381	
70	218	221	225	229	238	251	250	230	250	279	270	257	259	240	248	231	226	226	228	
75	119	122	121	127	128	141	141	134	139	148	150	147	147	137	134	124	123	123	124	
80	54.9	55.0	50.2	59.5	52.9	67.2	71.4	73.1	68.4	81.9	72.5	76.0	78.9	70.3	56.0	57.7	52.0	53.0	56.5	
85	7.43	9.46	12.3	15.9	14.7	15.4	16.5	19.4	23.7	27.5	23.5	20.4	18.7	16.0	16.3	15.7	13.6	9.64	8.71	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.3074A P:64.24W PF:0.9531 Freq:50.01Hz 实检光通:11420x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-65WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--2						单位: cd													
γ (DEG) \ C (DEG)	285	300	315	330	345														
0	8680	8680	8680	8680	8680														
5	8628	8637	8641	8652	8655														
10	8541	8545	8542	8552	8556														
15	8385	8381	8365	8382	8387														
20	7921	7910	7878	7906	7900														
25	6967	6938	6860	6914	6903														
30	5440	5404	5304	5357	5345														
35	3859	3827	3741	3851	3823														
40	2476	2490	2578	2637	2563														
45	1563	1659	1783	1794	1681														
50	1071	1169	1248	1260	1162														
55	752	830	889	894	812														
60	511	565	600	603	545														
65	334	364	382	382	349														
70	205	216	226	224	209														
75	114	116	114	117	115														
80	48.9	44.1	46.5	44.2	47.7														
85	7.96	9.21	8.62	9.06	7.37														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注: